



TSM110-8-530BMDG-550BMDG

110 CELL

Mono PERC Module

530-550Wp

Power Output Range

1500VDC

Maximum System Voltage

21.0%

Maximum Efficiency

KEY SALIENT FEATURES



Global, Tier 1 manufacturer brand, with independently certified state-of-the-art automated manufacturing



Bifacial technology enables additional energy harvesting from rear side (up to 30%)



Industry leading lowest thermal co-efficient of power



Excellent low irradiance performance



Excellent PID resistance



Dual stage 100% EL Inspection warranting defect-free product



Module Imp binning radically reduces string mismatch losses



Excellent wind load 2400Pa & snow load 5400Pa under certain installation method



Comprehensive product and system certification

- ♦ IEC61215:2016; IEC61730-1/-2:2016;
- ♦ ISO 9001:2015 Quality Management System
- ♦ ISO 14001:2015 Environmental Management System
- ♦ ISO 45001:2018 Occupational Health and Safety Management System



About Twinsel

Founded in 2002, Twinsel is a leading, excellent manufacturer of solar modules and solar off-grid systems. In 2022 its annual production capacity of solar modules reaches 2GW, Twinsel is committed to providing our customers with a wide range of services from consulting, scouting the site, design construction, financing to smart transportation. Our dream is to turn the desert into an oasis and the night into light. Bring our customers better price, more stable quality and better use experience.


TashanIndustryZoneMeilin, Ninghai 315609, Ningbo I PRC

Tel: +86-574-59953157 Fax: +86-574-59953959


E-mail: tony@twinsel.com Website: www.twinsel.com

LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty / 25 year Linear Power Warranty

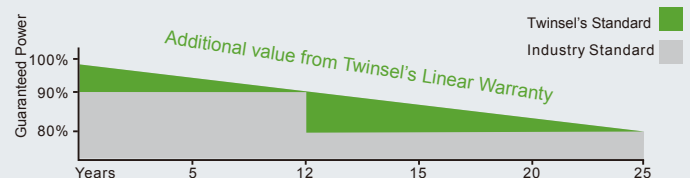

Dimensions of PV Module Unit: mm

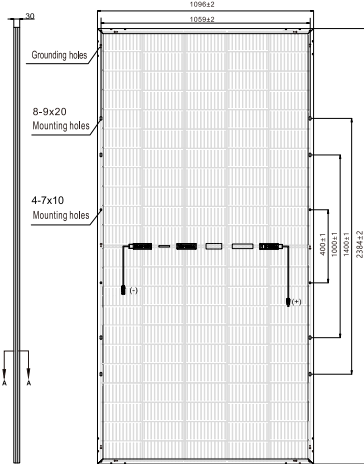

ELECTRICAL DATA(STC)

Model Number	TSM110-8-530BMDG	TSM110-8-535BMDG	TSM110-8-540BMDG	TSM110-8-545BMDG	TSM110-8-550BMDG
Rated Power in Watts-Pmax(Wp)	530	535	540	545	550
Open Circuit Voltage-Voc(V)	37.44	37.66	37.88	38.10	38.32
Short Circuit Current-Isc(A)	18.02	18.07	18.13	18.18	18.23
Maximum Power Voltage-Vmpp(V)	31.16	31.36	31.56	31.76	31.96
Maximum Power Current-Impp(A)	17.02	17.07	17.12	17.17	17.22
Module Efficiency (%) *	20.3	20.5	20.7	20.9	21.0

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
Bifacial factor: 70%±5 * Module Efficiency (%): Round-off to the nearest number

Electrical characteristics with 10% rear side power gain

	583	589	594	600	605
Total Equivalent power -Pmax (Wp)	583	589	594	600	605
Open Circuit Voltage-Voc(V)	37.44	37.66	37.88	38.10	38.32
Short Circuit Current-Isc(A)	19.82	19.88	19.94	20.00	20.05
Maximum Power Voltage-Vmpp(V)	31.16	31.36	31.56	31.76	31.96
Maximum Power Current-Impp(A)	18.72	18.78	18.83	18.89	18.94

Rear side power gain: The additional gain from the rear side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

ELECTRICAL DATA(NMOT)

Model Number	TSM110-8-530BMDG	TSM110-8-535BMDG	TSM110-8-540BMDG	TSM110-8-545BMDG	TSM110-8-550BMDG
Maximum Power-Pmax (Wp)	401.6	405.4	409.1	412.9	416.8
Open Circuit Voltage-Voc (V)	34.82	35.02	35.23	35.43	35.64
Short Circuit Current-Isc (A)	14.78	14.82	14.87	14.91	14.95
Maximum Power Voltage-Vmpp (V)	28.92	29.10	29.29	29.47	29.66
Maximum Power Current-Impp (A)	13.89	13.93	13.97	14.01	14.05

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA



Solar cells	Monocrystalline	
Cell configuration	110 cells (5×11+5×11)	
Module dimensions	2384×1096×30mm	
Cables	4.0mm ² (12AWG), Positive(+)350mm, Negative(-)230mm (Connector Included)	
Superstrate	High Transmission, Low Iron, Tempered ARC Glass	
Substrate	Tempered Glass	
Connector	Twinsel PV-SY02, IP68	
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes	
Weight	33±0.5kg	34kg
Frame	Anodized Aluminium Alloy type 6005-2T6, Silver Color	High strength alloy steel

TEMPERATURE&MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	44°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.04%/°C
Temperature Coefficient of Pmax	-0.34%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	35A
Limiting Reverse Current	35A

PACKAGING CONFIGURATION

	40ft(HQ)Aluminum Frame	40ft(HQ)Alloy Steel Frame
Number of modules per container	700	700
Number of modules per pallet	35	35
Number of pallets per container	20	20
Packaging box dimensions (LxWxH) in mm	2395×1100×1235	2395×1075×1235
Box gross weight[kg]	1223	1230

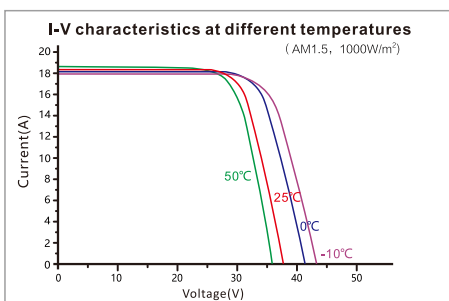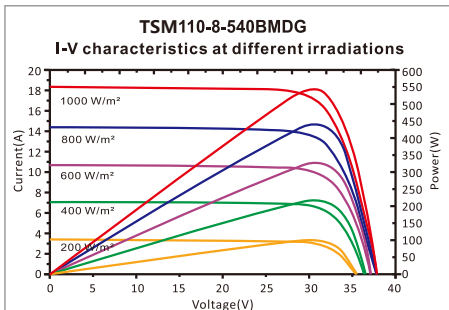

Our Partners: