


6 HiMAX

645~670W

210mm Cells Mono
PERC with MBB & Half-cut
Technology

Quality Guarantee

12-year Warranty for Materials and Processing
25-year Warranty for Extra Linear Power Output

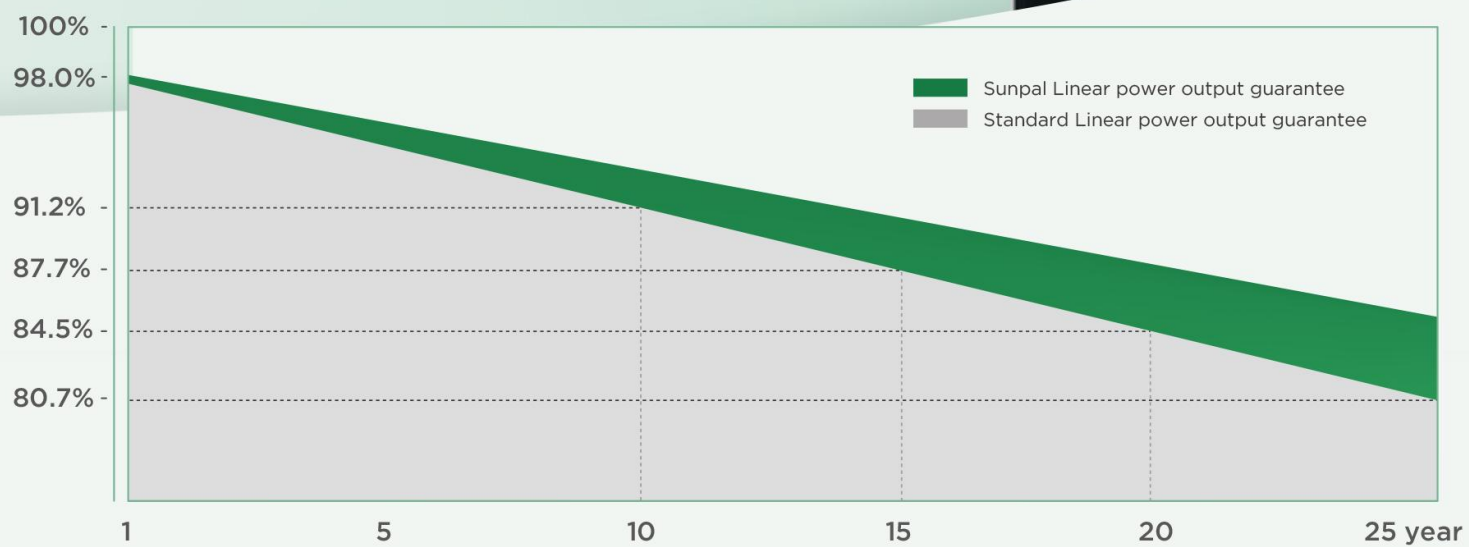

21.6%
Max Module Eff.

0~+5W
Positive Tolerance

Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730
ISO 9001:2008: ISO Quality Management System
ISO 14001: 2004: ISO Environment Management System
OHSAS 18001: 2007 Occupational Health and Safety



* Specifications subject to technical changes and tests. Sunpal Solar reserves the right of interpretation.

Positive power tolerance (0~+5W) guaranteed

High module conversion efficiency (up to 21.6%)

Slower power degradation enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

Solid PID resistance ensured by solar cell process optimization and careful module BOM selection


Reduced resistive loss with lower operating current

Higher energy yield with lower operating temperature

Reduced hot spot risk with optimized electrical design and lower operating current

WENSHFNG

Design (mm)

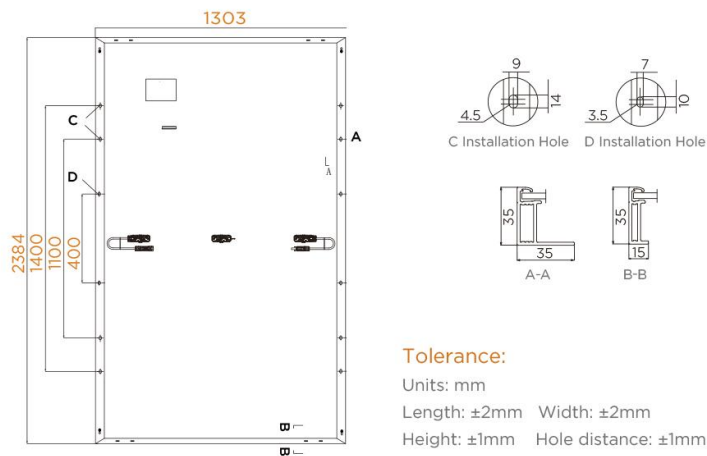

Cell Orientation	132 (6x22)
Junction Box	IP68, three diodes
Output Cable	4mm ² , 300mm in length, length can be customized
Glass	Single glass 3.2mm coated tempered glass
Frame	Anodized aluminum alloy frame
Weight:	33.6kg ± 3%
Dimension	2384×1303×35 mm
Packaging	30pcs per pallet 480pcs per 40'ft Container

Operational Temperature	-40°C~+85°C
Power Output Tolerance	0~+4.99W
Voc & Isc Tolerance	±3%
Max. System Voltage	DC1500V(IEC/UL)
Max. Series Fuse Ratin	30A
NOCT	45±2°C
Safety Class	II
Fire Rating	UL type 1 or 2
Max. Static Load(Front)	5400Pa
Max. Static Load(Back)	2400Pa

Electrical Characteristics

Model Number	SP645M-66H		SP650M-66H		SP655M-66H		SP660M-66H		SP665M-66H		SP670M-66H	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	645	488	650	492	655	496	660	500	665	504	670	508
Open Circuit Voltage (Voc/V)	45.1	42.5	45.3	42.7	45.5	42.9	45.7	43.0	45.9	43.2	46.1	43.4
Short Circuit Current (Isc/A)	18.39	14.82	18.44	14.86	18.48	14.89	18.53	14.93	18.57	14.96	18.62	15.01
Voltage at Maximum Power (Vmp/V)	37.2	34.8	37.4	34.9	37.6	35.1	37.8	35.3	38.0	35.4	38.2	35.6
Current at Maximum Power (Imp/A)	17.35	14.05	17.39	14.09	17.43	14.13	17.47	14.17	17.51	14.22	17.55	14.26
Module Efficiency(%)	20.8		20.9		21.1		21.2		21.4		21.6	
Temperature Coefficient of Isc	+0.040%/°C											
Temperature Coefficient of Voc	-0.250%/°C											
Temperature Coefficient of Pmax	-0.340%/°C											

* STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25°C, Spectra at AM1.5

* NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/S

*Test uncertainty for Pmax: ±3%

I-V Curve

