

MS-T872GF

580-600W

Topcon 16BB HALF-CUT BIFACIAL
DOUBLE GLASS MODULE

1.6°C

It's temperature is 1.6°C lower than that of the conventional module

4%

4% more energy generation



Half-Cut technique leads to increased power output

When the cells are cut into halves, the current are also halved, which enables less internal loss. Series-parallel wiring improves power performance. The working temperature of module and junction box are lower than that of conventional types, which effectively reduces the hot spot risk and reduces overall module damage.



Series-parallel wiring mode results in reduced shading loss

Series-parallel wiring will not only reduce power loss from shade but also improves the effective use of supports and space.



Excellent temperature performance

The temperature of HC module is 1.6 °C lower than that of the conventional module under the same working condition, which results less power loss.



Reduced encapsulation loss due to reduced current

HC module is of lower current and lower CTM loss at around 0.2%, while the CTM loss of conventional module is 1%.



1500V high system voltage design


LINEAR PERFORMANCE WARRANTY

12
years

Product warranty on materials and workmanship

30
years

Linear power output warranty

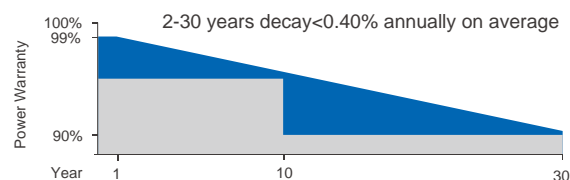

CERTIFICATES

ISO 9001: 2015
Quality Management System

ISO 14001: 2015
Environmental Management System

IEC 61215 / IEC 61730

OHSAS 18001: 2007
Occupational Health &
Safety Management System

*Certification requirements vary in different markets, please consult with Maysun Solar Co., Ltd. sales team for appropriate certification.



Topcon 16BB HALF-CUT BIFACIAL DOUBLE GLASS MODULE

MS-T872GF 580-600W

Topcon16BB HALF-CUT MODULE

ELECTRICAL PARAMETERS @ STC

Max. Power Output Pmax (W)	580	585	590	595	600
Power Tolerance	±3%	±3%	±3%	±3%	±3%
Max. Power Voltage Vmp (V)	44.04	44.22	44.43	44.64	44.85
Max. Power Current Imp (A)	13.17	13.23	13.28	13.33	13.38
Open Circuit Voltage Voc (V)	51.97	52.16	52.37	52.58	52.79
Short Circuit Current Isc (A)	13.80	13.85	13.89	13.93	13.97
Module Efficiency (%)	22.45	22.65	22.84	23.03	23.23

*STC (Standard Test Condition): Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5
*Measurement Tolerance (±3.0%)

Integrated Power @ STC (Reference to 590W front)

Power Gains	5%	10%	15%	20%	25%
Max. Power Output Pmax (W)	620	649	677	706	736
Max. Power Voltage Vmp (V)	44.43	44.43	44.33	44.33	44.33
Max. Power Current Imp (A)	13.94	14.61	15.27	15.94	16.60
Open Circuit Voltage Voc (V)	52.37	52.37	53.37	53.37	53.37
Short Circuit Current Isc (A)	14.58	15.28	15.97	16.67	17.36

TEMPERATURE COEFFICIENTS

Temperature Coefficients of Pmp	-0.30%/ °C
Temperature Coefficients of Voc	-0.25%/ °C
Temperature Coefficients of Isc	+0.046%/ °C

MECHANICAL PARAMETERS

Cell Type	Topcon 182x91mm
Number of Cells	144pcs(6x24)
Dimensions (L*W*H)	2278x1134x30mm
Weight	32 kg
Frame	Anodised Aluminum
Junction Box	IP68, 3 bypass diodes
Cable, Length	4.0mm ² , 300mm or customized

OPERATING CONDITION


Maximum System Voltage(V)	1500(DC)
Operating Temperature(C)	-40~+85
Max. Wind Load / Snow Load(pa)	2400/5400
Max. Series Fuse Rating(A)	30
Fire Rating	Class A
Bifaciality	70±5%
NOCT(°C)	45±2

PACKAGE INFORMATION



Container 40'HQ	720pcs
Quantity / Pallet	36
Package size :2334x1124x1249mm	Net weight : 1152kg Gross weight : 1210.7kg

*Specifications are subject to change without prior notice.

ASSEMBLY DRAWING (Unit:mm)

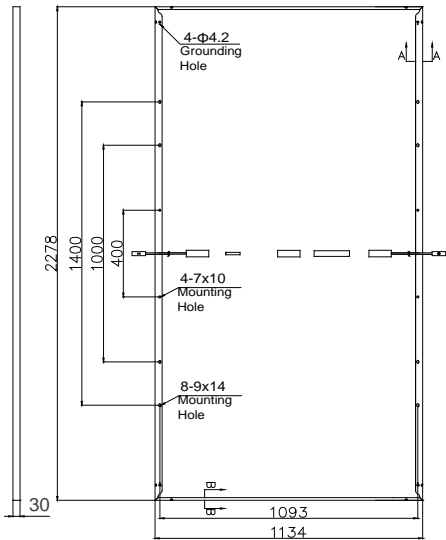

I-V CURVES

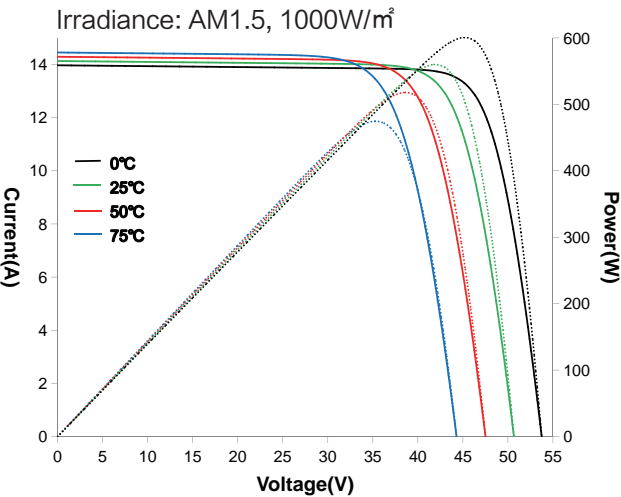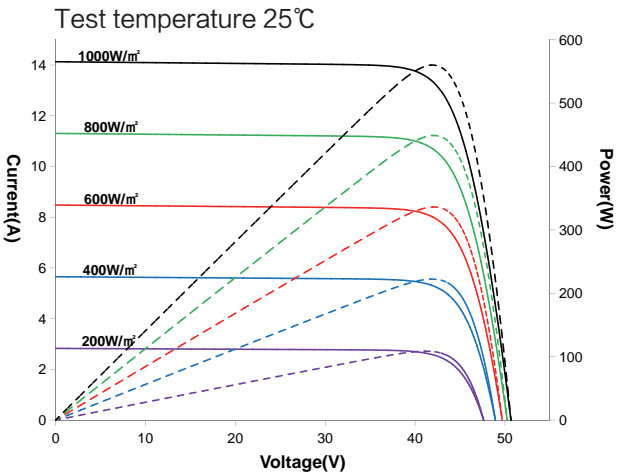

Maysun Solar Co., Ltd.

Glamorous Beauty-New Energy Trend

www.maysunpv.com