

# Sun-Pursuit Pro Series

TOPCon Bifacial  
132 - cell Module

TW-630HDB-1 FULL BLACK

**605-630W**

0-3% Positive Tolerance



## • MODULE FEATURES

- High efficiency**  
TOPCon technology improves efficiency, increases power generation, and contributes to lower LCOE.
- Lower heat spot risk**  
Innovative circuit design and "Half Cell" structure decrease the temperature of heat spots and effectively reduce power loss.
- Excellent low-light performance**  
Reliable performance in low-light conditions such as in the morning, at dusk or during raining days.
- Resilient to extreme weather**  
Carefully selected materials ensure the module still works well under the condition of 2400Pa wind load and 5400Pa snow load.
- ANTI PID**  
High quality solar cell and advanced processing technology contribute to excellent PID resistance performance.
- Double-sided electricity generation**  
Power can be generated on both sides to support additional output gains of up to 25%. The multi-busbar half-cut technology can boost energy density to deliver higher output.


## • Quality Certification



## • Product Qualification



## • Performance Warranty

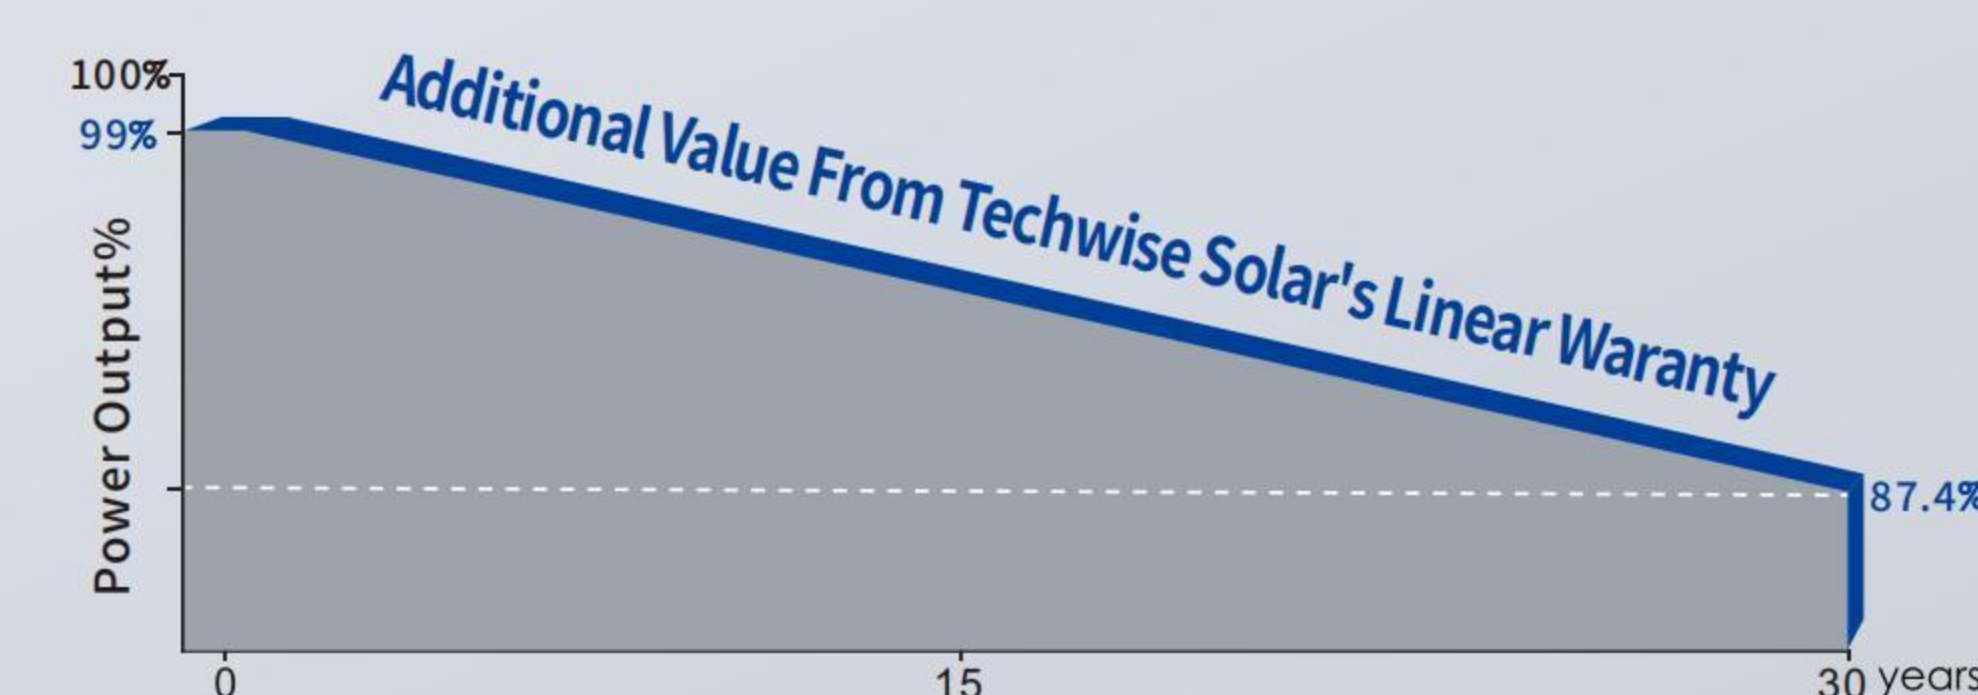

**15** 15 Years Product Warranty

**30** 30 Years Linear Power Warranty

## TW-630HDB-1

### • Product Specification •

Cell Type	Mono crystalline
Cell Quantity	132 cell
Cell Size (mm)	182*105
Module Size (mm)	2382*1134*30
Module Weight (kg)	33.5
Glass Thickness (mm)	2.0
Frame Material	Anodized aluminum alloy
Junction Box	IP68
Cable/Connector	4mm <sup>2</sup> , MC4 compatible
Cable Length	+300mm/-300mm; or Customize
Max System Volt (V)	1500V DC
Max Fuse Rate (A)	30
Power Tolerance (%)	0-+3%

### • Electrical Characteristics •

#### STC standard performance >>>

Power Level	605	610	615	620	625	630
Pmax(W)	605	610	615	620	625	630
Vmp(V)	40.50	40.70	40.90	41.10	41.30	41.50
Imp(A)	14.95	15.00	15.05	15.10	15.15	15.20
Voc(V)	48.71	48.91	49.11	49.31	49.51	49.71
Isc(A)	15.81	15.86	15.93	15.98	16.03	16.08
Module Efficiency (%)	22.40	22.58	22.77	22.95	23.14	23.32

#### NOCT standard performance >>>

Power Level	605	610	615	620	625	630
Pmax(W)	454	458	461	465	469	473
Vmp(V)	37.95	38.14	38.33	38.51	38.70	38.89
Imp(A)	11.96	12.00	12.04	12.08	12.12	12.16
Voc(V)	46.29	46.48	46.67	46.86	47.05	47.24
Isc(A)	12.66	12.71	12.75	12.79	12.83	12.87

### • Bifacial Output-backside Power Gain •

5% Pmax(W)	635	641	646	651	656	661
5% Module Efficiency	23.50	23.70	23.90	24.10	24.30	24.49
15% Pmax(W)	696	702	707	713	719	725
15% Module Efficiency	25.80	26.00	26.20	26.40	26.60	26.82
25% Pmax(W)	756	763	769	775	781	788
25% Module Efficiency	28.00	28.20	28.50	28.70	28.92	29.15


### • Temperature Characteristics •

Operating Temp (°C)	-40~85
Operating Humidity (°C)	5~85
Hail Load Tolerance	25mm hailstone with velocity of 23m/s
Temp Coefficient	-0.340
Temp Coefficient Isc (%/°C)	0.04
Temp Coefficient Voc (%/°C)	-0.25
Operating Temp (°C)	44±2





Add: Shangman Industrial Park, Caobu Town  
Rudong County, Nantong City, Jiangsu Province, China  
Tel: 86-513-81900128  
Web: www.techwisesolar.com  
Email: salesdept@techwisesolar.com

### • Engineering Drawings •

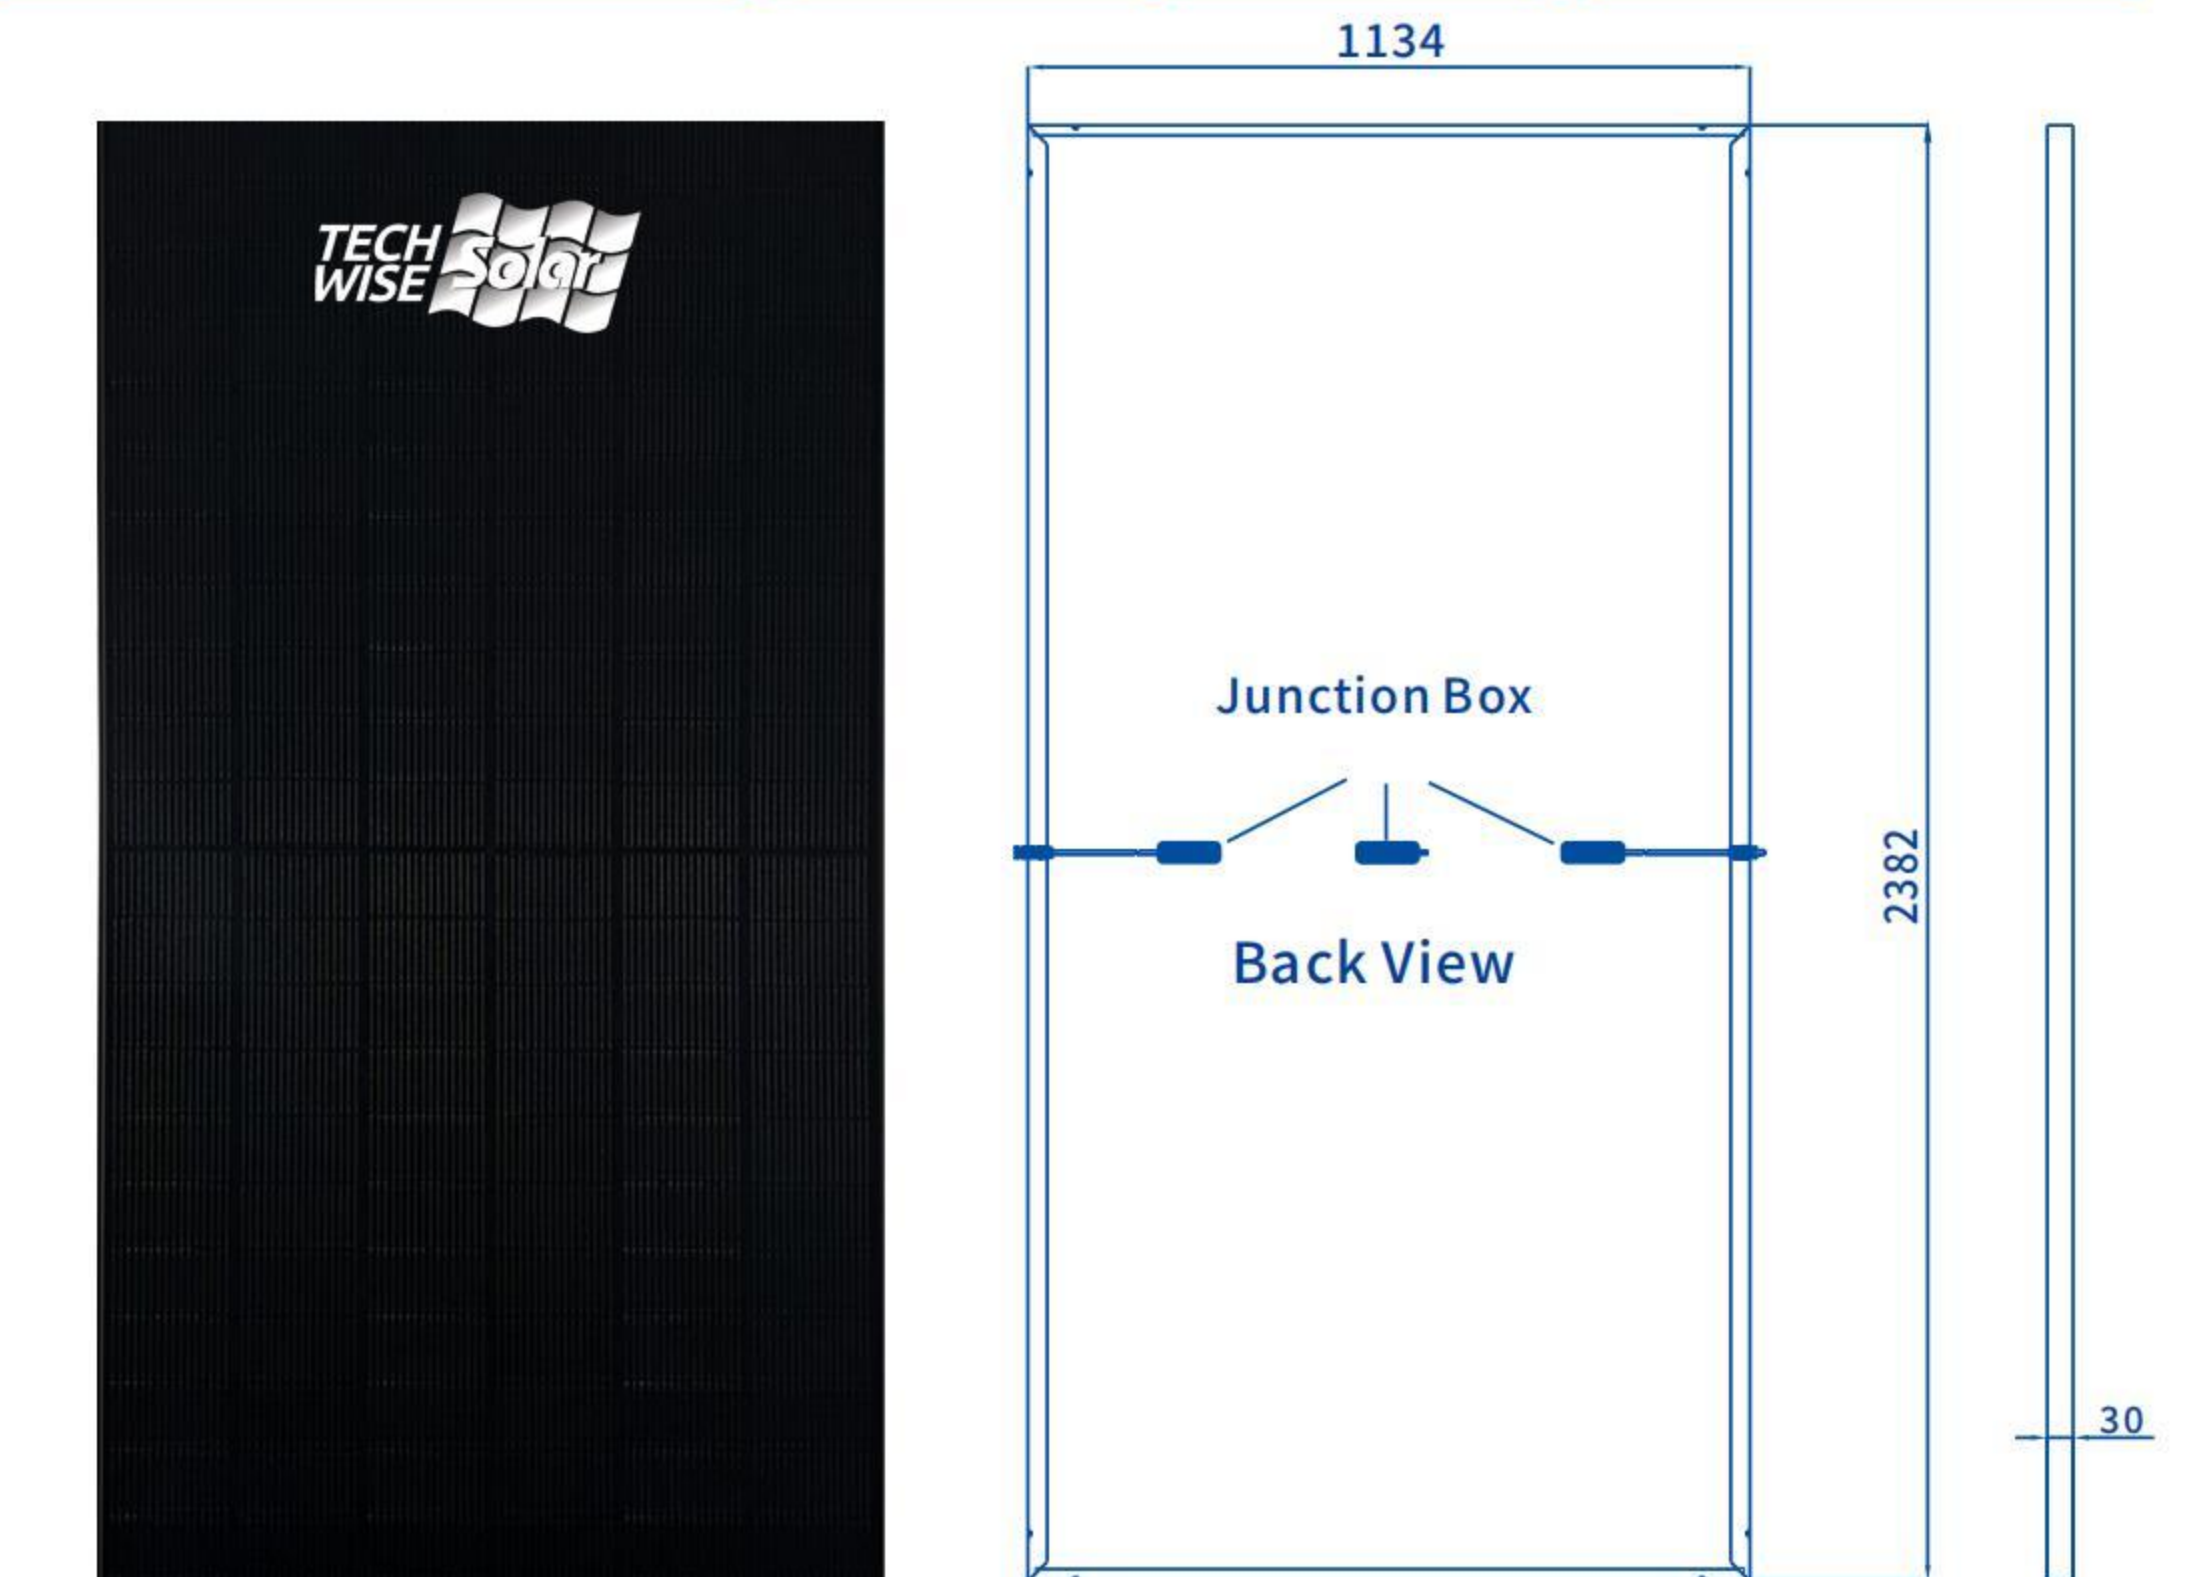

### • I-V Curve •

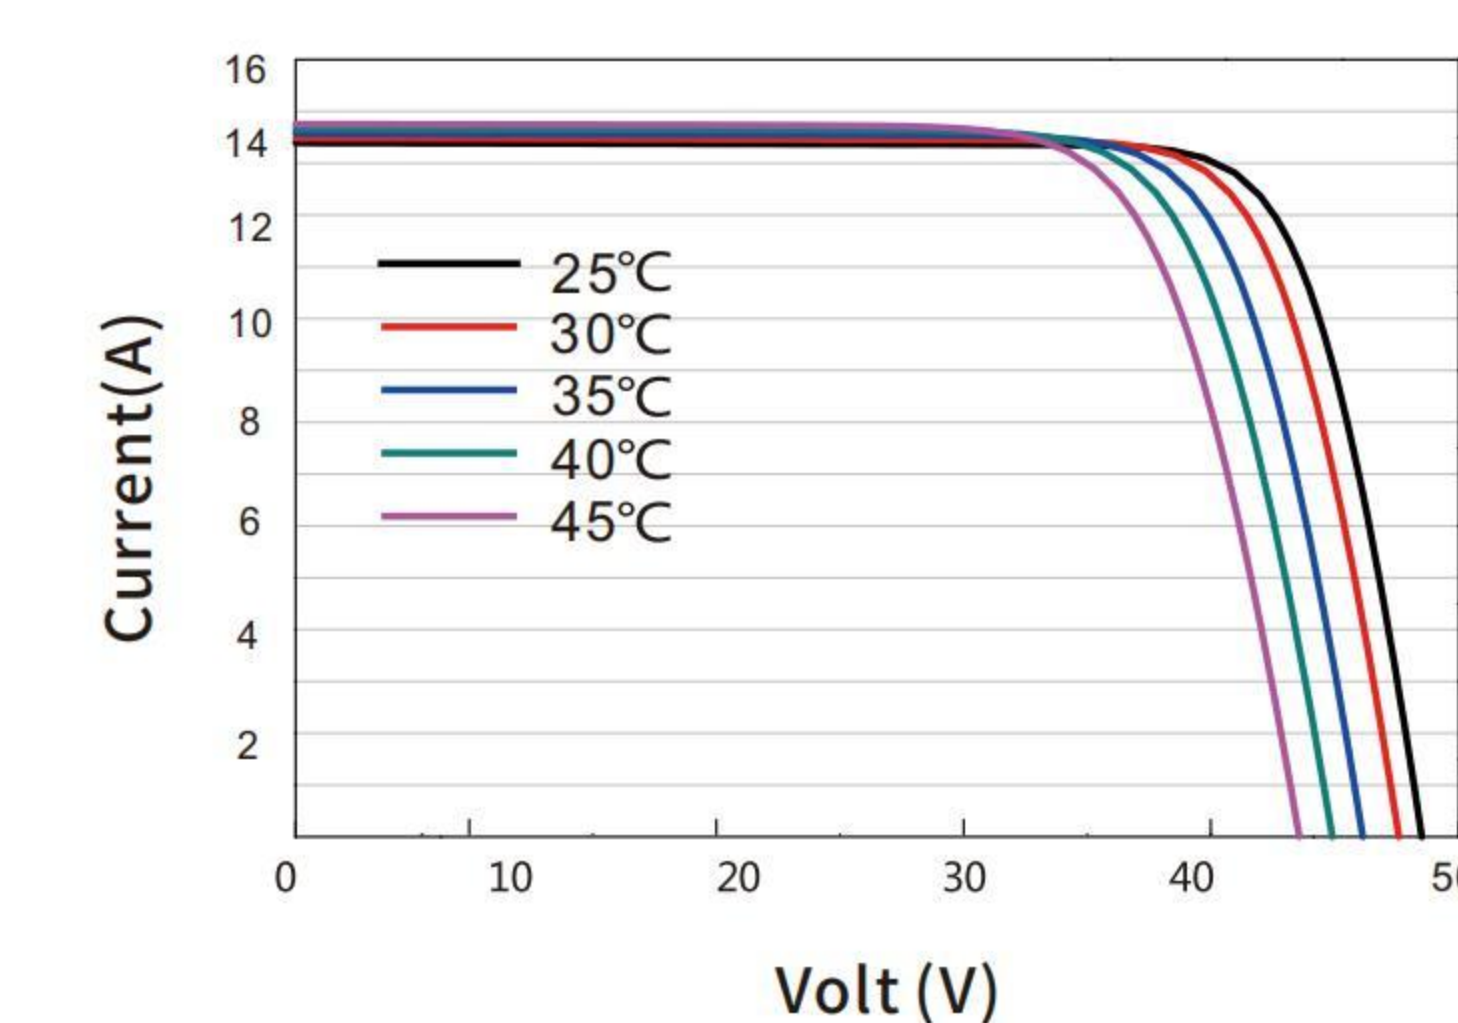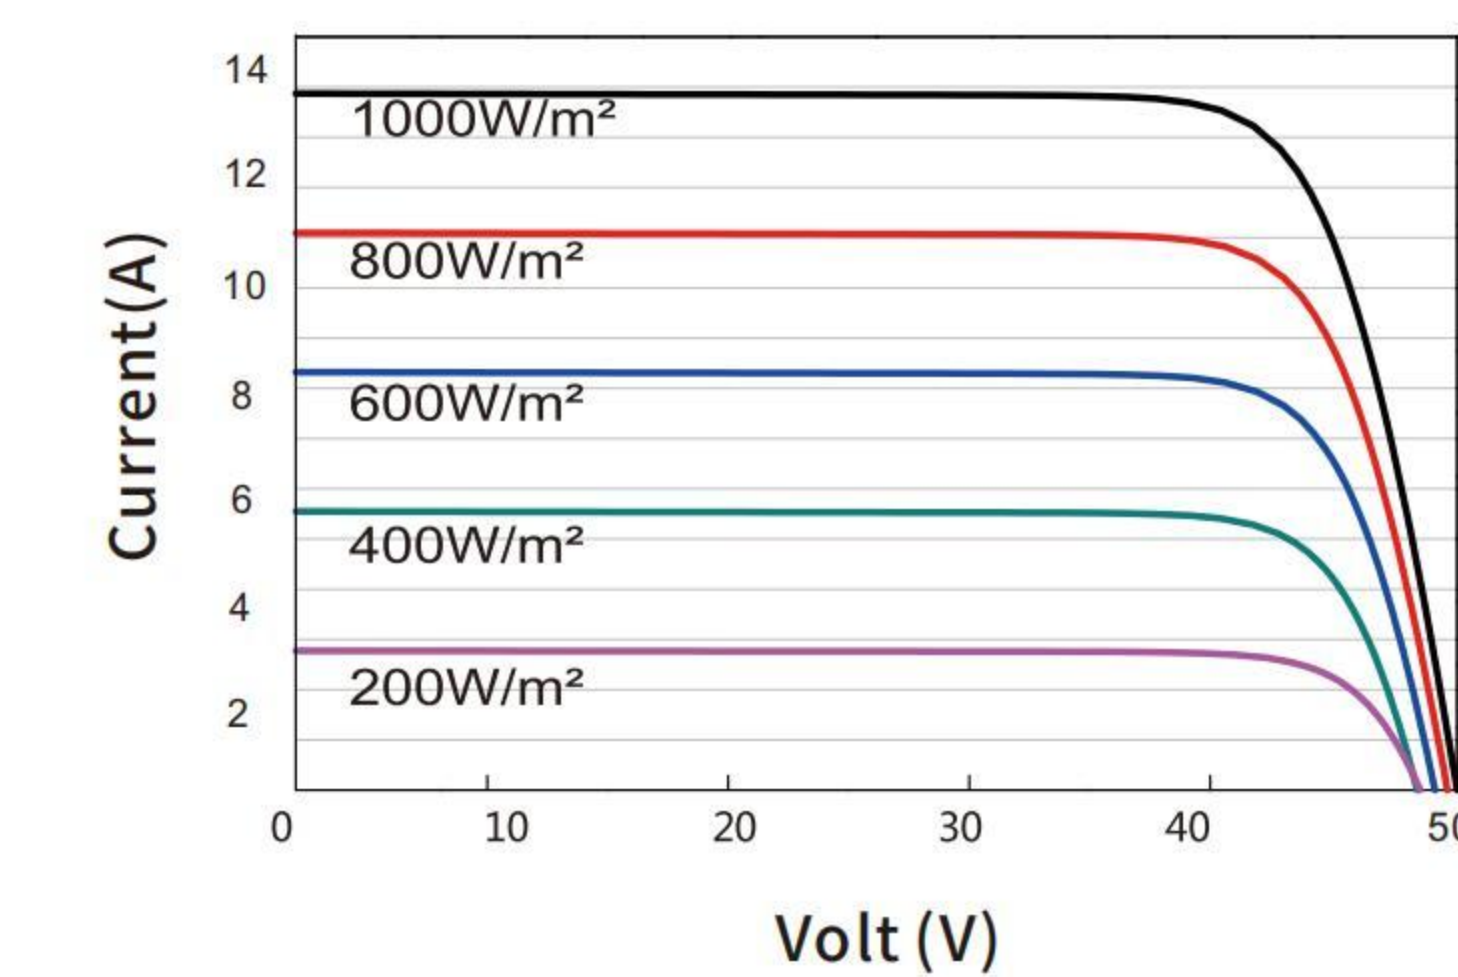

### • Packaging Info •

Pieces per Pallet	36
Size of Packaging (mm)	2396*1125*1270
Weight of per Pallet (kg)	1231
Pieces per Container	720
Size of Container	40'HC

All data and specifications included in this brochure may subject to be modified without notice. All Rights reserved by TechWise Solar Co. (May 2024 V3 Edition)