

SF-M21/132

710-725W

210 ± 1.5 × 105 ± 1.5mm

Cells 132


Bifacial Single Glass

N-TYPE Half-Cell Module

Max Power Out: 725W

Max Efficiency: 23.34%

Power Tolerance: 0~+5W

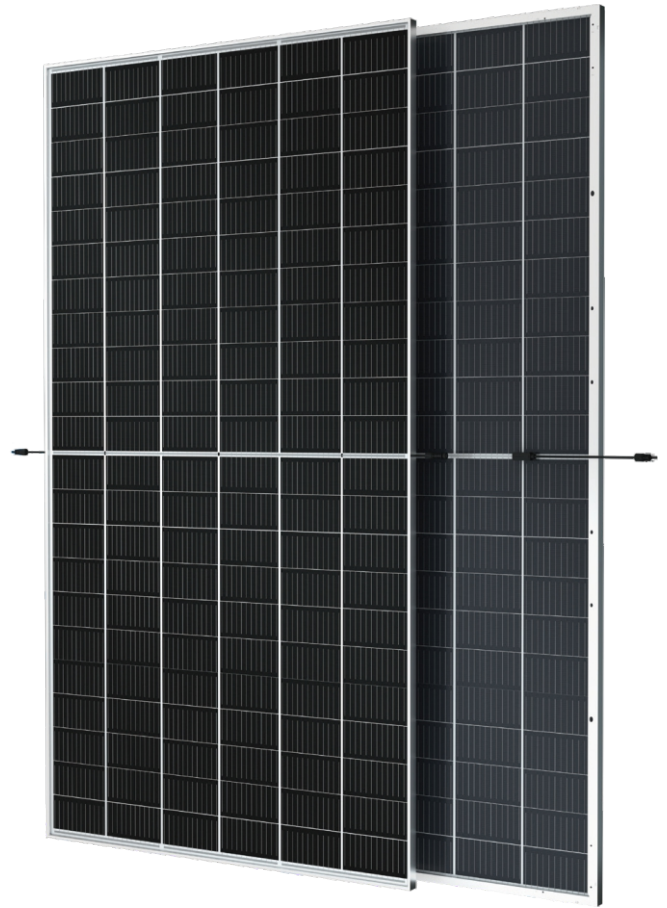

SMBB Technology

Better light trapping and current collection to improve module power output and reliability



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



Reduced Hot Spot Loss

Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient.



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




High Energy Generation, Low LCOE

Low Pmax temp coefficient increases energy production

Superior Warranty

- 15-year material & technology warranty
- 30-year linear power output warranty

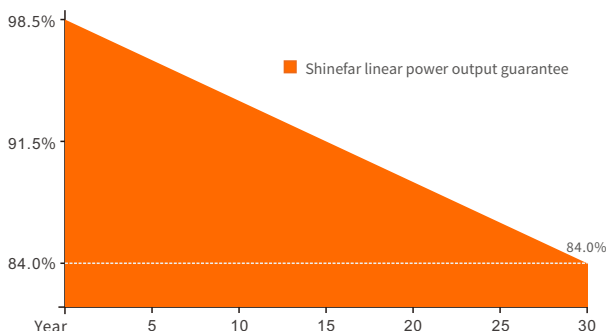


Comprehensive Products and System Certificates

- IEC/EN61215-1:2021 & IEC/EN61215-2:2021
- IEC/EN61730-1:2016 & IEC/EN61730-2:2016
- UL61730-1:2017 & UL61730-2:2017
- UL61215-1:2017 & UL61215-2:2017
- IEC 61701:2020-Saltmist
- IEC 62716:2013-Ammonia
- IEC 62804:2020-PID
- IECCE Certificate Body (CB)
- UKCA:EN61730-2018
- ISO9001 & ISO14001 & ISO45001



Engineering Drawings

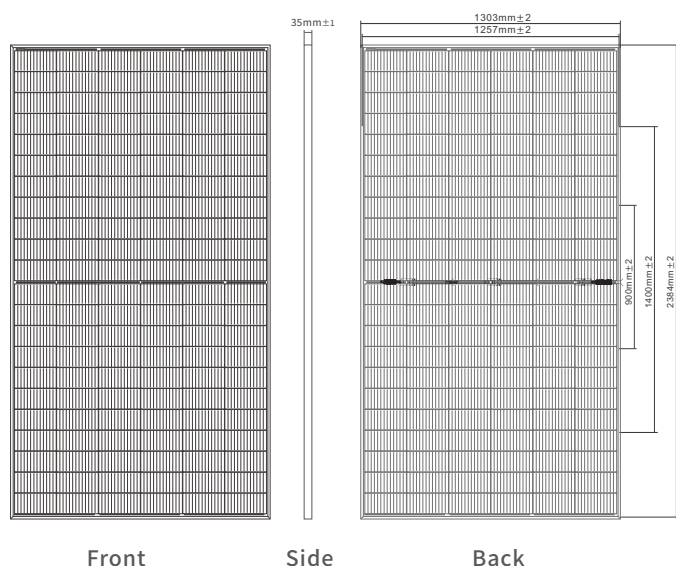

Structural Parameter

Dimensions of Module	2384×1303×35mm
Weight	33.8kg
Packing	31PCS/Pallet, 558PCS/40HQ
Front Glass	High Transparency Solar Glass 3.2mm
Back Glass	Transparent or Transparent Grid
Frame	Anodized Aluminum Alloy & Custom Color Accepted
J-Box	IP68 Rated
Cable	4.0mm ² , 300mm
Bypass Diodes	3PCS
Wind/ Snow Load	2400Pa/5400Pa
Connector	MC4 Compatible

Electrical Specification

(STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5G — NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s)

Module Type	SF-M18/132710		SF-M18/132715		SF-M18/132720		SF-M18/132725	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax) [W]	710	537	715	541	720	545	725	549
Maximum Power Voltage (Vmp) [V]	39.80	37.13	40.00	37.32	40.20	37.51	40.40	37.69
Maximum Power Current (Imp) [A]	17.84	14.47	17.96	14.50	18.00	14.53	18.03	14.56
Open Circuit Voltage (Voc) [V]	47.70	44.93	47.90	45.12	48.10	45.31	48.30	45.50
Short Circuit Current (Isc) [A]	18.87	15.19	19.00	15.27	19.03	15.29	19.06	15.32
Module Efficiency [%]	22.86		23.02		23.18		23.34	
Cell Type [mm]	Mono 210±1.5×105±1.5, 132 Cells							
Operational Temperature [°C]	-40~+85°C							
Maximum System Voltage	1500V DC							
Max Series Fuse Rating	30A							

Electrical Characteristics With Different Power Bin (Reference to 10% Irradiance Ratio)

	760	765	770	776
Total Equivalent Power (Pmax) [Wp]	760	765	770	776
Maximum Power Voltage (Vmp) [V]	39.80	40.00	40.20	40.40
Maximum Power Current (Imp) [A]	19.09	19.13	19.16	19.20
Open Circuit Voltage (Voc) [V]	47.70	47.90	48.10	48.30
Short Circuit Current (Isc) [A]	20.19	20.22	20.26	20.29
Irradiance Ratio (Rear/Front)	10%			

Temperature Ratings

Nominal Operating Cell Temperature	45±2°C
Temperature Coefficient of Isc	+0.05%/°C
Temperature Coefficient of Voc	-0.23%/°C
Temperature Coefficient of Pmax	-0.30%/°C

Curve Diagram

