

Haitai TaiHe2.0 (210R)

HTM600~620DMH6-66NT

TOPCon Bifacial high efficiency PV module

22.95%

Module Efficiency

PRODUCT FEATURES

High Power Output
N-type MBB half cut technology, improve energy density, bring higher power output.
High Bifacial Factor, up to 25% extra power generation

High Durability
Passed TUV Salt & Ammonia corrosion test, and 2400Pa wind load, 5400Pa snow load test, higher reliability


Better Low Light Performance
Higher power generation compare with standard module in cloudy, foggy and low light condition

Low Power Degradation
First year power degradation <1.0%, year 2-30 power degradation <0.40% each year

Low Temperature coefficient
Passivated contact cell technology for higher power generation in operating

Better Anti-LID
N-type cells with boron-oxide-free composite LID to increase module power generation

LINEAR PERFORMANCE WARRANTY

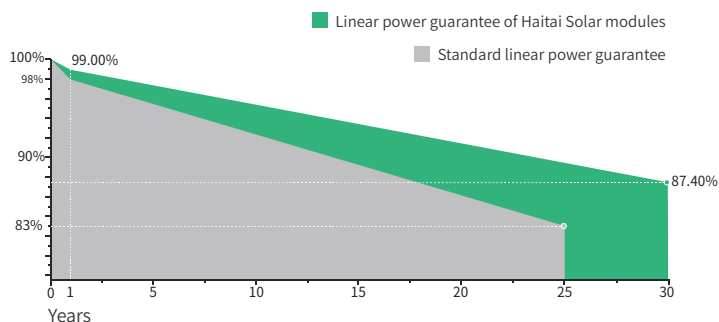

12 YEARS product warranty

30 YEARS linear power warranty

0.40% Linear attenuation of 0.40% per year within 30 years

CERTIFICATES

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational health and safety management systems

Electrical Data (STC)

Maximum Power (Pmax/W)	600	605	610	615	620
Open Circuit Voltage (Voc/V)	47.77	47.92	48.07	48.22	48.37
Short Circuit Current (Isc/A)	15.70	15.78	15.86	15.94	16.02
Voltage at Maximum Power (Vmp/V)	39.52	39.67	39.82	39.97	40.12
Current at Maximum Power (Imp/A)	15.19	15.26	15.32	15.39	15.46
Module Efficiency (%)	22.21	22.40	22.58	22.77	22.95
Operating Temperature	-40° C~+85° C				
Maximum System Voltage	1000/1500V				
STC (Standard Testing Conditions): Irradiance 1000W/m ² , Cell Temperature 25°C, AM1.5					

Electrical Data (NMOT)

Maximum Power (Pmax/W)	451	455	459	463	467
Open Circuit Voltage (Voc/V)	45.34	45.49	45.64	45.79	45.94
Short Circuit Current (Isc/A)	12.84	12.91	12.98	13.05	13.12
Voltage at Maximum Power (Vmp/V)	37.19	37.34	37.49	37.64	37.79
Current at Maximum Power (Imp/A)	12.14	12.19	12.25	12.31	12.37

NMOT (Nominal Module Operating Temperature): Irradiance 800W/m², Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s.

Bifacial Power Generation Parameters (Backside Gains)

5%	Maximum Power (Pmax/W)	630	635	641	646	651
	Module Efficiency (%)	23.32	23.52	23.71	23.91	24.10
15%	Maximum Power (Pmax/W)	690	696	702	707	713
	Module Efficiency (%)	25.54	25.76	25.97	26.18	26.40
25%	Maximum Power (Pmax/W)	750	756	763	769	775
	Module Efficiency (%)	27.77	28.00	28.23	28.46	28.69

Mechanical Data

Cell Type	182×105mm Mono
Cell Orientation	132(6×22)
Module Dimensions	2382×1134×30mm
Weight	33.0kg
Glass	2.0mm high transmittance, reinforced glass
Backsheet	2.0mm part of the structure is grid-like white ceramic glass
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm ² positive pole: 200 mm negative pole: 250 mm wire length can be customized
Connector	MC4 compatible connector


Temperature Coefficients

Temperature Coefficient (Pm)	-0.300%/°C
Temperature Coefficient (Voc)	-0.250%/°C
Temperature Coefficient (Isc)	0.046%/°C
NMOT (Nominal Module Operating Temperature)	41±3°C



Packaging

Transportation methods	Number of modules per cabinet	Number of modules per pallet
40HQ container	720 pcs	36 pcs +36 pcs

Module Dimensions (mm)

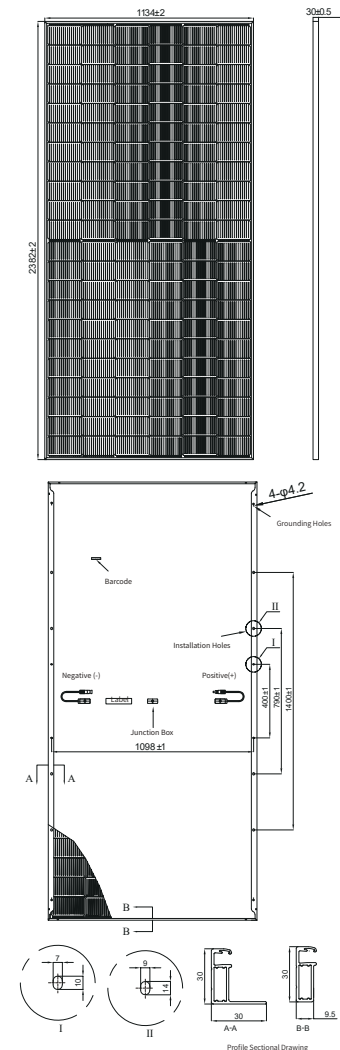

I-V Curve

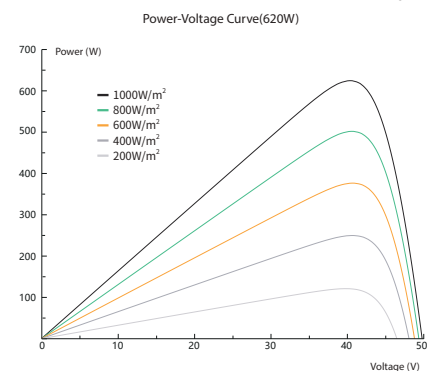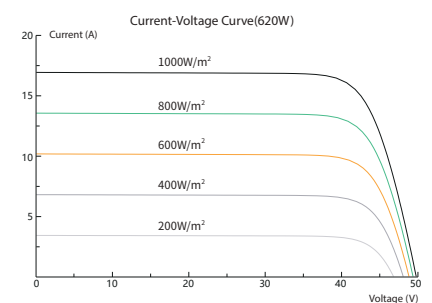

Web: www.haitai-solar.com
E-mail: ht@htsolargroup.com

Data contained in these specifications is subject to change without notice.
Haitai Solar reserves the right to final interpretation of content.

HAITAI20230210EN