

WWW.RESUNSOLAR.COM




132 Cells
Mono N-type/Topcon 18 BB

700-720W
Power output

23.18%
The Highest Efficiency

±3%
Tolerance

**0.5% Annual Degradation
over 30 years**

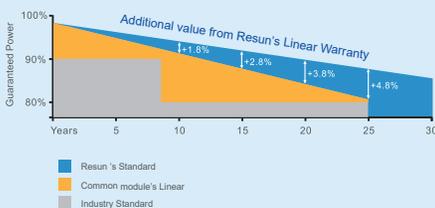

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty
30 Year Linear Power Warranty

RS9H-M TOPCON

RS9H-M HALF-CELL series is produced with N-Type high efficiency SMBB cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti PIO performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO9001 TUV PID-FREE CEIEC61215/61730/61701/62716




RS9H-M TOPCON



GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

Dimension of PV Modules Unit: mm

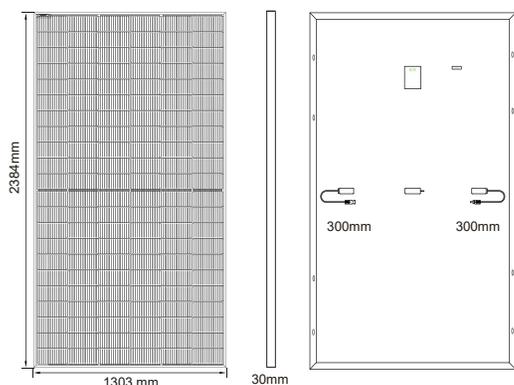

ELECTRICAL DATA(STC)

	700	705	710	715	720
Rated Power in Watts-Pmax(Wp)	700	705	710	715	720
Open Circuit Voltage-Voc(V)	47.30	48.80	49.00	49.20	49.40
Short Circuit Current-Isc(A)	18.92	18.36	18.40	18.44	18.49
Maximum Power Voltage-Vmp(V)	39.40	40.70	40.90	41.10	41.30
Maximum Power Current-Imp(A)	17.77	17.33	17.36	17.40	17.44
Module Efficiency(%)	22.53%	22.70%	22.86%	23.02%	23.18%


STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)


	532	538	542	546	550
Maximum Power-Pmax(Wp)	532	538	542	546	550
Open Circuit Voltage-Voc (V)	44.60	46.12	46.31	46.49	46.68
Short Circuit Current-Isc(A)	15.29	14.83	14.87	14.90	14.94
Maximum Power Voltage-Vmp(V)	36.80	38.26	38.45	38.63	38.82
Maximum Power Current-Imp(A)	14.47	14.06	14.10	14.13	14.17

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

I-V CURVES OF PV MODULE(705W)

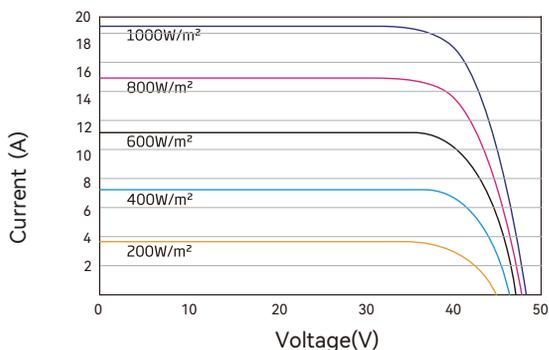

P-V CURVES OF PV MODULE(705W)

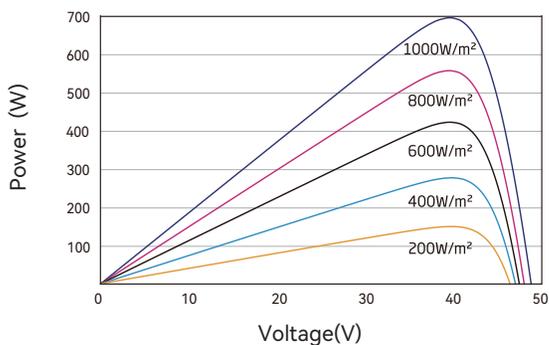

MECHANICAL DATA

Solar Cells	Mono-crystalline TOPCON 210*105mm, 18 Bus bars
Cell Configuration	132cells(6*22)
Module Dimensions	2384*1303*30mm
Weight	32.3kg
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminium Alloy
J-Box	IP68, 3 Diodes
Cable	4mm ² (IEC)/12AWG(UL),300mm(+)/300mm(-) or customized length
Connectors	MC4 or MC4 Compatible

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.25%/C
Temperature Coefficient of Isc	0.045%/C
Temperature Coefficient of Pmax	-0.30%/C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	30A
Limiting Reverse Current	30A

PACKAGING CONFIGURATION

	40HQ
pcs/container	648pcs
pcs/pallet	36pcs
pallets/container	18pallets

Add: No: 30 Yongshun Road, Zhulin Town, Jintan District, Changzhou, Jiangsu Province, China
 Tel: +86 512-66292101
 E-mail: sales@restarsolar.com
 Web: www.restarsolar.com