

485W JAT54S40 LR

n-type Monofacial Module

Module efficiency up to **24.3%**




Superior Efficiency for Maximum Energy Yield



Advanced Cell & Module Technology for Better Performance in Partial Shade



Outstanding High-Temperature Performance & Long-Term Reliability

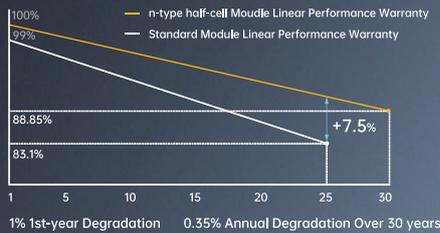

15-year product warranty



30-year linear power output warranty

Comprehensive Certificates

IEC 61215, IEC 61730

ISO 9001: 2015 Quality management systems


ISO 14001: 2015 Environmental management systems

ISO 45001: 2018 Occupational health and safety management systems

IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



JAT54S40 LR n-type Monofacial Module

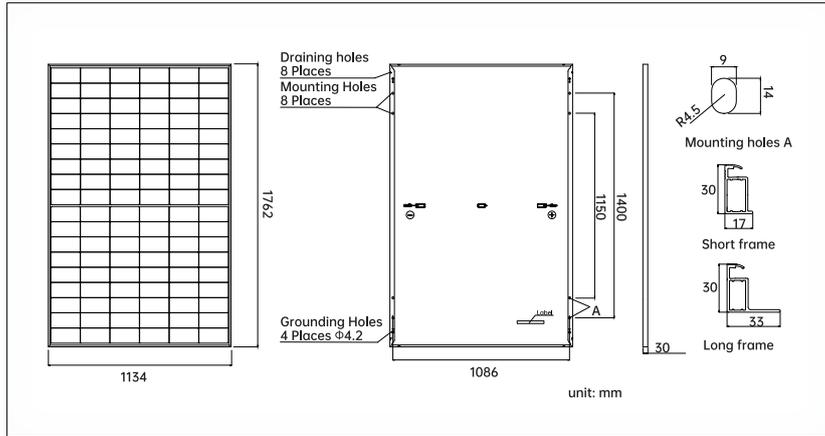

MECHANICAL PARAMETERS

Cell	Mono
Weight	19.3kg
Dimensions	1762mm×1134mm×30mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	108(6×18)
Junction Box	IP68, 3diodes
Connector	Stäubli PV-KST4-EVO2A/xy, PV-KBT4-EVO2A/xy QC Solar QC4.10-351/ QC4.10-35
Cable Length (Including Connector)	Portrait: 400mm(+)/200mm(-) Landscape: 1200mm(+)/1200mm(-)
Glass	2.8mm
Packaging Configuration	36pcs/Pallet, 936pcs/40HQ Container
Country of Manufacturer	China/Vietnam


Remark: customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC

TYPE	JAT54S40 -460/LR	JAT54S40 -465/LR	JAT54S40 -470/LR	JAT54S40 -475/LR	JAT54S40 -480/LR	JAT54S40 -485/LR
Rated Maximum Power(Pmax) [W]	460	465	470	475	480	485
Open Circuit Voltage (Voc) [V]	40.81	40.88	40.96	41.03	41.10	41.17
Maximum Power Voltage(Vmp) [V]	34.48	34.61	34.74	34.87	35.00	35.13
Short Circuit Current(Isc) [A]	14.72	14.78	14.84	14.90	14.96	15.02
Maximum Power Current(Imp) [A]	13.36	13.45	13.54	13.63	13.72	13.81
Module Efficiency [%]	23.3	23.3	23.5	23.8	24.0	24.3
Power Selection	0~+3%					
Temperature Coefficient of Isc(α_{Isc})	+0.050%/°C					
Temperature Coefficient of Voc (β_{Voc})	-0.220%/°C					
Temperature Coefficient of Pmax(γ_{Pmp})	-0.260%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.
Measurement tolerance at STC: Pmax±3%, Voc±3%, Isc±5%.

CHARACTERISTICS

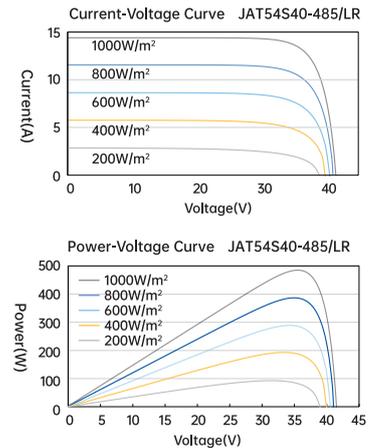

ELECTRICAL PARAMETERS AT NOCT

TYPE	JAT54S40 -460/LR	JAT54S40 -465/LR	JAT54S40 -470/LR	JAT54S40 -475/LR	JAT54S40 -480/LR	JAT54S40 -485/LR
Rated Max Power(Pmax) [W]	347	350	354	358	362	366
Open Circuit Voltage(Voc) [V]	38.54	38.61	38.68	38.74	38.81	38.88
Max Power Voltage(Vmp) [V]	32.57	32.69	32.81	32.92	33.05	33.18
Short Circuit Current(Isc) [A]	11.91	11.96	12.00	12.04	12.10	12.15
Max Power Current(Imp) [A]	10.65	10.73	10.80	10.88	10.94	11.02
NOCT	Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G					

OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~+70°C
Maximum Series Fuse Rating	25A
Maximum Static Load, Front	5400Pa(112 lb/ft ²)
Maximum Static Load, Back	2400Pa(50 lb/ft ²)
NOCT	45±2°C
Safety Class	Class II
Fire Performance	Class C

*PV module 98th percentile operating temperature: 70°C