



# SOLID

series

# Bifacial

Transparent

⚡ 435 W

🇪🇺 Made in the EU

3,2+3,2 mm glass



Fire class A



10 500 Pa  
Extreme load resistance



NH<sub>3</sub>  
Ammonia resistance




40 mm  
Hail resistance class 4



98 %  
recyclable



35 %  
of recycled glass content

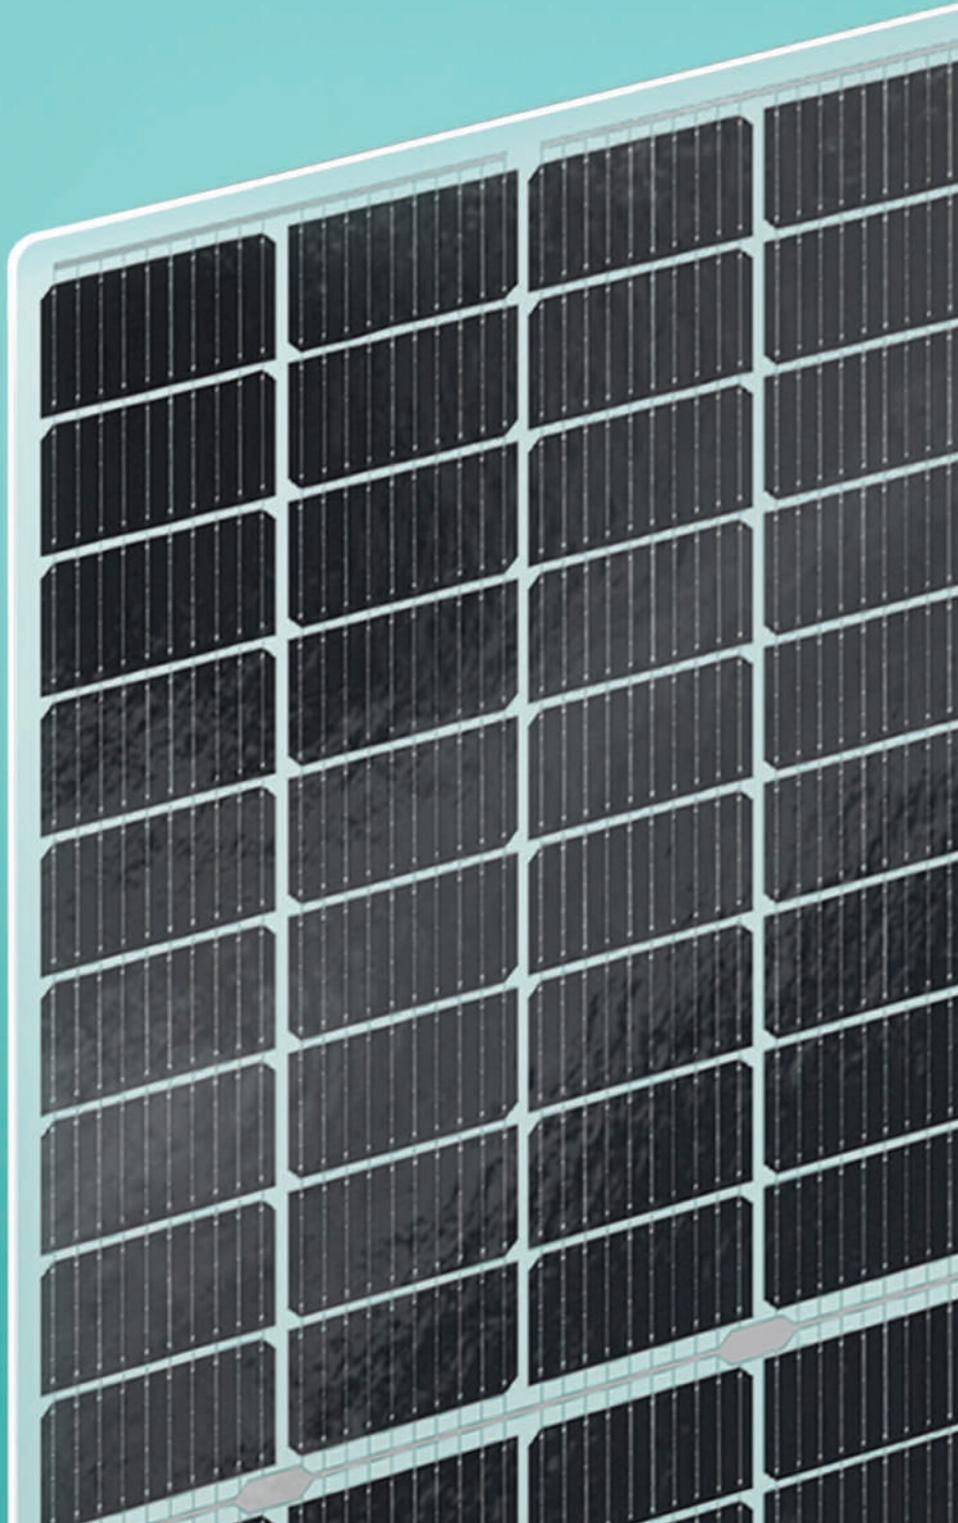

**30** Product & Efficiency Guarantee  
YEAR

**90%** POWER WARRANTY



THE FIRST AND ONLY  
IN THE WORLD

Deutsches Institut für Bautechnik




ONE OF A FEW IN THE WORLD

Electrical data (STC*)	
Maximum power (W)	435
Cell technology	N type, TOPCon - bifacial
Open circuit voltage ( $V_{oc}/V$ )	38,92
Short circuit current ( $I_{sc}/A$ )	13,80
Max power voltage ( $V_{mpp}/V$ )	32,96
Max power current ( $I_{mpp}/A$ )	13,20
Module efficiency ( $\eta$ )	22,07 %
Max system voltage (V)	1500
Max current (A)	25
Power tolerance	0/+5W

\*Under standard test conditions (STC) of irradiance of 1000W/sq.m., spectrum AM1.5 and cell temperature of 25°C. Flash testing measurement accuracy of +/-5%.

Warranty	
30 years product warranty	
30 years efficiency warranty	
First year degradation (%)	1
Annual degradation (%)	0,31
Power in year 30 (%)	90

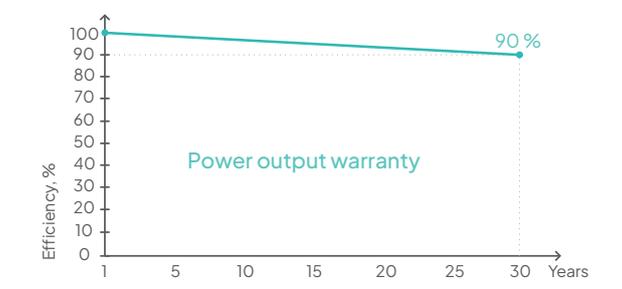


Certifications	
IEC 61215:2021; IEC 61730:2023	
Cradle to Cradle (C2C)	Gold level
abZ/aBG	National technical approval / General construction technique permit
MCS 005	Microgeneration Certification Scheme for solar modules
IEC 62716:2013	Ammonia corrosion testing
IEC 61701:2020	Salt mist corrosion testing
IEC 61215-2:2021	40 mm hailstone - Hail resistance class 4 (HW4)
ISO 9001:2015	Quality management systems
ISO 14001:2015	Environmental management systems
ISO 45001:2018	Occupational health and safety
SundaHus	A level assessment
Produced using 100% renewable energy	
Membership at Svensk Solenergi	



Temperature ratings	
Current temperature coefficient ( $\beta$ )	+0,045% / °C
Voltage temperature coefficient ( $\beta$ )	-0,250% / °C
Power temperature coefficient ( $\delta$ )	-0,300% / °C
Nominal operating module temperature	46 °C

Mechanical data	
Dimensions (LxWxH) (mm)	1729x1140x7,2
Dimensions with edge sealing (LxWxH) (mm)	1733±2x1144±2x7,2
Weight (kg)	32
Front glass (mm)	3,2 structured, low reflection, with AR coating, TVG
Back glass (mm)	3,2, transparent, TVG
Cell Size (mm)	182x91,875
Busbars	10
Cell configuration	6x18
Frame	Frameless
Rated operating altitude (m)	Up to 2000
Operating temperature (°C)	-40 ÷ +85
Maximum test load (wind/snow) (Pa)	5400/10500
Junction box / IP class	Split junction box / IP68
Cable cross section size (mm <sup>2</sup> )	4
Cable length (m)	1,2
Bypass diodes	3
Connector	MC4-EVO2

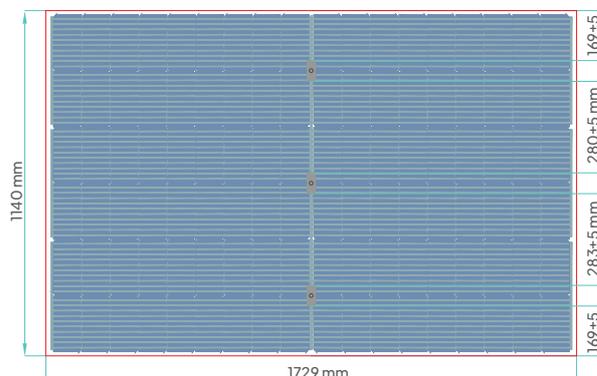

Packing information	
Modules per pallet (pcs)	25
Dimensions of a pallet (LxWxH) (mm)	1860x1220x1100
Weight of a pallet (gross) (kg)	887
Pallets per 13,6 m truck (pcs)	22
Modules per 13,6 m truck (pcs)	550

