

# 66QL6-BDV

650-670 Watt

85 ± 5% Bifaciality

BIFACIAL MODULE



## Higher Power on Front Side

Leading power class based on the enhanced N-type TOPCon platform, through cutting-edge technology and an optimized layout that captures more sunlight.



## Better Generation on Rear Side

Enabling industry-leading bifaciality in TOPCon cells through an improved structure that enhances light absorption and trapping.



## Optimized Heat Resistance

Optimized temperature coefficient via advanced graphical patterning, busbar and multi-cells technology.



## Proven Low Light Performance

Enhanced cell structure ensures superior module performance under low-light conditions.




## Industry Leading Warranty

Advanced metallization and iterated module encapsulation deliver superior resistance to PID, LID / LeTID, and UV degradation.



## Mechanical Load Enhanced

Certified to withstand:  
5400 Pa front side max static test load  
2400 Pa rear side max static test load

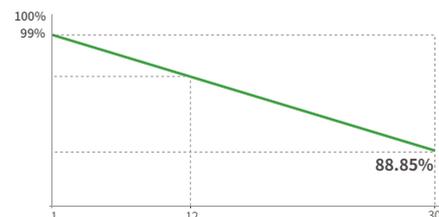

**12** Year Product Warranty | **30** Year Linear Power Warranty | **1%** First-year Degradation | **0.35%** Annual Degradation Over 30 Years

- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



JKM650-670N-66QL6-BDV-F2-EU

# 66QL6-BDV 650-670 Watt

## Mechanical Characteristics

Cell Type	N-type Mono-crystalline
No. of Cells	264 (66×4)
Dimensions	2382×1134×30 mm
Weight	32.5 kg
Front Glass	2.0 mm, Anti-reflection Coating
Back Glass	2.0 mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	JK03M / JK03M2 / Others*
Output Cables (Including Connector)	4.0 mm <sup>2</sup> (+): 600 mm , (-): 400 mm or Customized Length

\*MC4-EVO2 available upon request and subject to availability

## Packaging Configuration

Pallet Dimensions	2396×1110×1251 mm
Packing Detail (Two pallets = One stack)	36 pcs/pallet, 72 pcs/stack, 720 pcs/ 40'HQ Container

## Specifications (STC)

Maximum Power - Pmax [Wp]	650	655	660	665	670
Maximum Power Voltage - Vmp [V]	42.57	42.70	42.83	42.96	43.09
Maximum Power Current - Imp [A]	15.27	15.34	15.41	15.48	15.55
Open-circuit Voltage - Voc [V]	50.26	50.44	50.62	50.80	50.98
Short-circuit Current - Isc [A]	15.98	16.04	16.10	16.16	16.22
Module Efficiency STC [%]	24.06	24.25	24.43	24.62	24.80
Bifacial Factor	85 ± 5%				
Power Sorting	0 ~ +3 %				
Temperature Coefficient of Pmax	-0.26 %/°C				
Temperature Coefficient of Voc	-0.24 %/°C				
Temperature Coefficient of Isc	0.046 %/°C				

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5

## Specifications (BNPI)

Maximum Power - Pmax [Wp]	724	729	735	741	746
Maximum Power Voltage - Vmp [V]	42.52	42.69	42.86	43.03	43.20
Maximum Power Current - Imp [A]	17.04	17.10	17.17	17.23	17.30
Open-circuit Voltage - Voc [V]	50.38	50.56	50.74	50.92	51.10
Short-circuit Current - Isc [A]	17.80	17.87	17.94	18.00	18.07


BNPI: Irradiance: Front 1000W/m<sup>2</sup>, Rear 135W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5

## Application Conditions

Level T <sub>98</sub> ≤ 70 °C	-40 °C ~ +70 °C*
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	35 A
Bifaciality Coefficients	φVoc: 98±5 %, φIsc: 85±5 %, φPmax: 85±5 %

\*Short-term up to 85°C; higher operation requires IEC TS 63126 testing


## Engineering Drawings

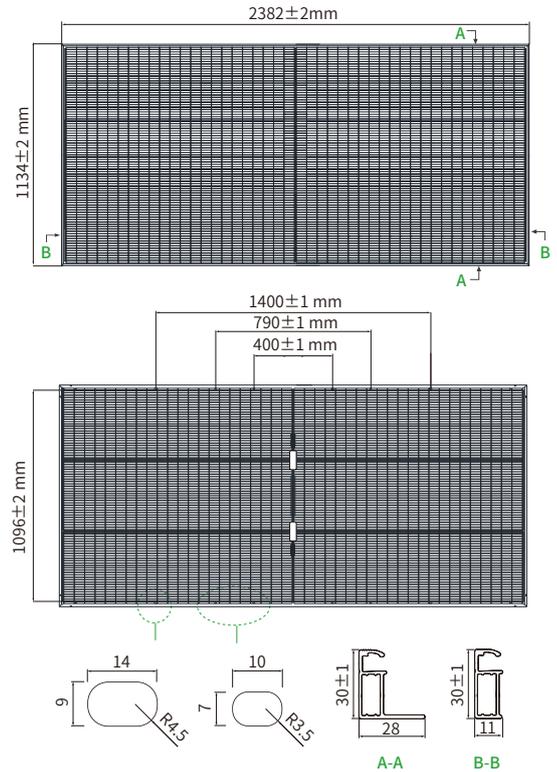

Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

## Electrical Performance

Power-Voltage Curves (66QL6-BDV 660W)

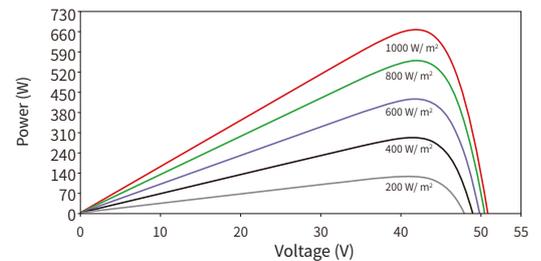

Current-Voltage Curves (66QL6-BDV 660W)

