

# NM12-150L

12V 150Ah / 10hr rate



## Introduction

**Generagy NML (Long life) Series** is designed for solar and renewable energy system. GEL electrolyte and AGM separator are applied in this series with feature of long service life. It is widely used in solar and wind power system, UPS and power utility.


## Battery Features

- Increase durability and deep cycle ability for heavy demand applications
- Low self-discharge
- Fully tank formed plates
- Low impurity electrolyte
- Spill proof / leak proof
- Multi-position usage
- ABS case and cover VO upon request
- Very high purity lead

## Electrical Specification

Design floating Life @ 20°C (68°F)	10 years
Nominal Capacity @ 25°C /77°F	
20 hour rate 8.23A to 1.75Vpc	164.6 Ah
10 hour rate 15.68A to 1.75Vpc	156.8 Ah
Internal Resistance	
(Fully charged battery @ 25°C /77°F)	4mΩ
Max. Discharge Current @ 25°C /77°F	1500 A (5S)
Charge Methods: Constant voltage charge @ 25°C /77°F	
Cycle Use	14.7 ~ 14.9V
Max. Current	40 A
Standby Use	13.6 - 13.8V
Operating Temperature Range	-30 ~ 50°C
<i>Notes: battery voltage must be adjusted according to temperature. Please refer to our recommendation.</i>	
Self-Discharge	<3% of capacity declined per month @ 25°C (77°F).

## Battery Picture & Terminal Layout

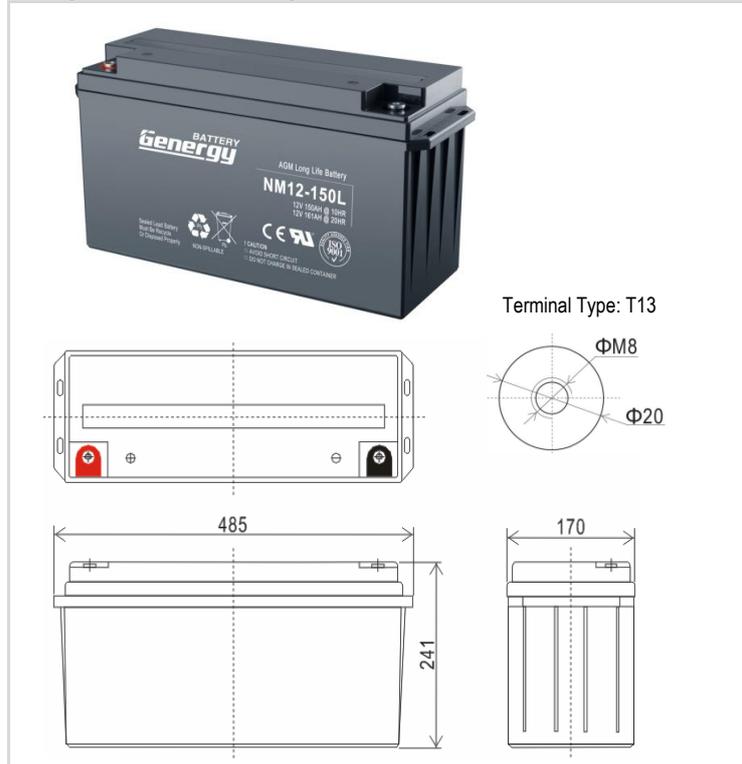

## Dimension & Weight

Length	Dimension (± 2mm)			Total Height	Weight (± 2%)
	Width	Height			
485 mm	170 mm	241 mm	241 mm	44.3 kg	
19.1 inch	6.7 inch	9.5 inch	9.5 inch	97.7 lbs	

## Typical Applications

- Solar/Wind Energy System
- Power Utility
- UPS/EPS

## Certificates



## Constant Current Discharge (Amperes @ 25°C /77°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	375.4	286.5	248.6	210.7	179.8	161.9	151.0	140.1	129.6	121.4	114.8	62.07	45.23	37.49	31.46	16.38	8.60
1.65	356.4	272.1	236.3	200.6	171.7	154.6	144.4	134.2	124.5	117.0	111.2	59.96	43.53	36.00	30.17	15.99	8.39
1.70	341.7	260.9	227.0	193.1	166.2	149.5	139.7	129.9	120.6	113.5	108.0	58.15	42.53	35.15	29.48	15.83	8.31
1.75	325.9	248.8	216.9	184.9	159.9	143.8	134.7	125.6	117.0	110.5	105.7	56.79	41.61	34.38	28.86	15.68	8.23
1.80	309.1	236.0	206.2	176.4	153.6	138.1	129.5	120.9	112.8	106.9	102.6	54.98	40.60	33.54	28.17	15.27	8.02

## Constant Power Discharge (Watts/cell @ 25°C /77°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	651.9	497.6	437.9	378.2	330.7	297.4	276.3	255.1	234.7	215.7	200.2	111.97	82.32	69.46	57.80	32.05	16.91
1.65	628.8	480.0	423.3	366.6	322.0	289.5	269.2	248.9	229.2	211.0	196.3	109.70	81.55	68.69	57.03	31.74	16.91
1.70	604.6	461.5	407.6	353.6	311.7	280.3	261.1	241.8	223.2	206.0	192.4	107.44	80.01	67.50	56.18	31.13	16.68
1.75	578.3	441.4	390.5	339.5	300.7	270.4	252.1	233.9	216.4	200.3	187.8	104.72	77.69	65.84	55.18	30.89	16.38
1.80	549.9	419.8	372.1	324.4	288.9	259.6	242.4	225.3	208.8	193.8	182.3	101.54	75.61	64.18	53.95	30.59	16.23

Subject to revision without notice. Please contact our sales representatives for latest version.

Web: [www.generagybattery.com](http://www.generagybattery.com) | Email: [sales@generagybattery.com](mailto:sales@generagybattery.com)

# NM12-150L

12V 150Ah / 10hr rate



Graphs

