



**HD51.2-100(51.2V100Ah)
LiFePO4 Battery Pack Specification**

DOC NO. : HD/PK23-L074

REV : A1.0

PAGE: 1 of 6

DATE: 2023-05-06

LiFePO4 Battery Pack Specification

Model No: HD51.2-100(51.2V100Ah)

Designed	Checked	Approved
Yu	Han	Anson Zhao



**HD51.2-100(51.2V100Ah)
LiFePO4 Battery Pack Specification**

DOC NO. : HD/PK23-L074

REV : A1.0

PAGE: 2 of 6

DATE: 2023-05-06

CONTENT

1. Preface.....	3
2. Product and Model.....	3
3. Battery Pack Specifications	4
4. Standard Test Conditions.....	4
5. Characteristics	5
6.Characteristics Curve.....	5
7 Cautions.....	6



HD51.2-100(51.2V100Ah) LiFePO4 Battery Pack Specification

DOC NO. :HD/PK23-L074

REV : A1.0

PAGE: 3 of 6

DATE: 2023-05-06

1. Preface

This specification describes the type and size, performance, technical characteristics, warning and caution of the HD51.2-100(51.2V100Ah) LiFePO4 rechargeable battery pack. The specification only applies to HD51.2-100(51.2V100Ah) LiFePO4 rechargeable battery pack supplied by Haidi Energy Technology Co.,Ltd.

2. Product and Model

2.1 Product: HD51.2-100(51.2V100Ah) LiFePO4 Battery Pack

2.2 System Configuration:

Standard pack:52148117-3.2V-16S1P





HD51.2-100(51.2V100Ah) LiFePO4 Battery Pack Specification

DOC NO. : HD/PK23-L074

REV : A1.0

PAGE: 4 of 6

DATE: 2023-05-06

3. Battery Pack Specifications

Items	Standard	Comments
Nominal Voltage	51.2V	16S
Typical Capacity	100Ah	At 0.2C discharge rate
Max Continuous Discharge current	100A	
Discharge Cut-off Voltage	About 40 V	
Charge Input Voltage	58.4±0.05V	Charge mode: CC/CV , Use a constant current, constant voltage(CC/CV)
Max Charge Current	≤100A	
Operation Temperature Range	Charge/ Discharge	0°C ~ +45°C/-20°C ~ +60°C
	Discharge	When the environment temperature is higher than 45°C , please pay attention to ventilation and heat rejection.
Storage Temperature Range	0°C ~ 40°C (Capacity 80%)	Recommended long-term storage temperature is 15~25°C
Humidity	5%≤RH≤85%	
Cabinet Material	Metal Case	
Total Weight	51kg±2kg	
Size (L*W*H)	(590*150*550)±2mm	
Protection Function	Over charge protection、 Over discharge protection、 Over current protection、 Short circuit protection , Temperature protection.	
Communicate	CAN/RS485	
Number of Parallel Connections	32	



HD51.2-100(51.2V100Ah) LiFePO4 Battery Pack Specification

DOC NO. : HD/PK23-L074

REV : A1.0

PAGE: 5 of 6

DATE: 2023-05-06

4. Standard Test Conditions

All test in this specification should be in standard atmospheric conditions: temperature:

25± 5°C, relative humidity: 65±20%.

5. Characteristics

5.1 Standard charge

Charge the battery with the Battery special test cabinet, supply 58.4voltage, constant-current 0.2C(A) current until current down to 0.02C (A) .

5.2 Standard discharge

Discharge the battery at 0.2C (A) to 40 V or battery cut off voltage.

5.3 Electrical Performance

Test Items	Test Methods	Test Standards
Capacity retention rate	After standard charge under 5.1 specified conditions, store the cells for 28 days, then discharge at 0.2C (A) to cut-off voltage.	Capacity retention rate≥80%
Cycle Life	1) Standard charge at 0.2C (A) , 2) Rest 0.5~1 h 3) Discharge at 0.2C to cut off voltage 4) Capacity retention rate≥80%	>2000cycles @ 100% DOD; >3000cycles @ 90% DOD; >4000cycles @ 80% DOD;



HD51.2-100(51.2V100Ah) LiFePO4 Battery Pack Specification

DOC NO. : HD/PK23-L074


REV : A1.0

PAGE: 6 of 6

DATE: 2023-05-06

6.Characteristics Curve

51.2V100Ah Charge-Discharge Curve (25°C)

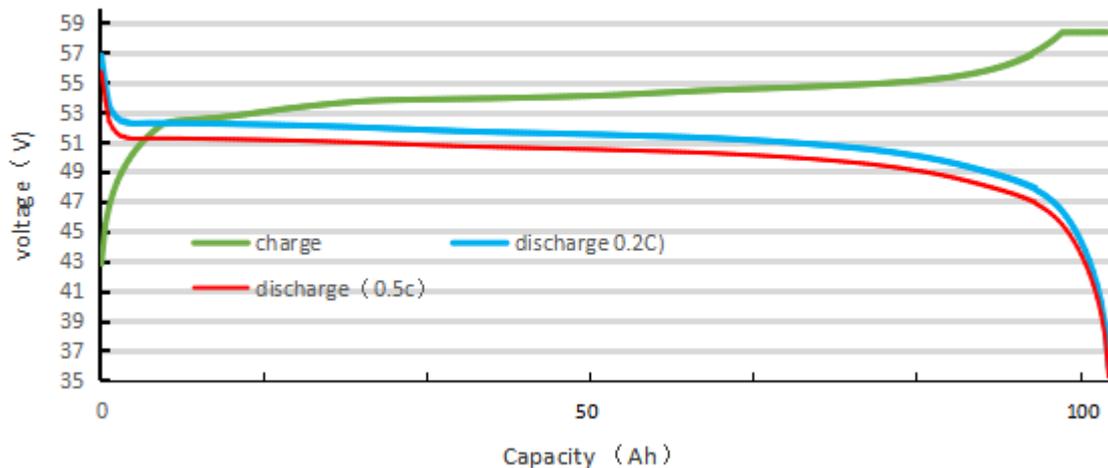

7. Cautions

7.1 Charging current should not be more than maximum charge current specified in the Product Specification , Charging current bigger than recommended current may damage the battery;

7.2 Discharging current should be no more than maximum discharge current specified in the Product Specification ; Discharging current bigger than recommended discharge current may damage the battery;

7.3 It should be noted that the cell would be possible to be at a over-discharged state by its self-discharge characteristics in case the cell is not used for long time. In order to prevent over-discharging, the cell shall be charged periodically to maintain between 52.8V and 54.4V (Recommended 3 months one cycle) .Over-discharging may causes loss of cell performance, characteristics, or battery functions;

7.4 Please charge the battery within 12 hours after use;

7.5 Battery storage environment follow the above conditions and in standard atmosphere, should be without strong magnet, no power, no static;

7.6 Do not reverse the polarity of the battery pack for any reason;

7.7 Do not short circuit the battery pack;

7.8 Do not reverse polarity charging;



**HD51.2-100(51.2V100Ah)
LiFePO4 Battery Pack Specification**

DOC NO. : HD/PK23-L074

REV : A1.0

PAGE: 7 of 6

DATE: 2023-05-06

7.9 Battery packs can be combined in series or in parallel according to the specification;

7.10 Do not immerse the battery pack in water or sea water, or get it wet;

7.11 Do not disassemble battery;

7.12 Do not expose the battery to extreme heat or flame;

7.13 Please use a compatible charger for charging;