



Hitouch 6N

HN21N-66HT

695-720W

BIFACIAL

High Efficiency Module

23.2%

Maximum Efficiency



Long-Term Reliability

Module certified to withstand 5400 Pa positive static load and 2400 Pa negative static load.

Excellent anti-PID performance to guarantee a better sustainability in harsh environment.



Lower Hot Spot and Crack Risk

Reduce hot-spot risk with optimized electrical design and lower operating current.

Reduce crack risk by optimization of solar cell design.



Higher Power Output

Higher module conversion efficiency benefit from bigger wafer and half-cell structure.


Better light trapping and current collection to improve module power output and reliability.



Excellent Temperature Coefficient

Lower operating temperature and temperature coefficient increases the power output.

Power Warranty

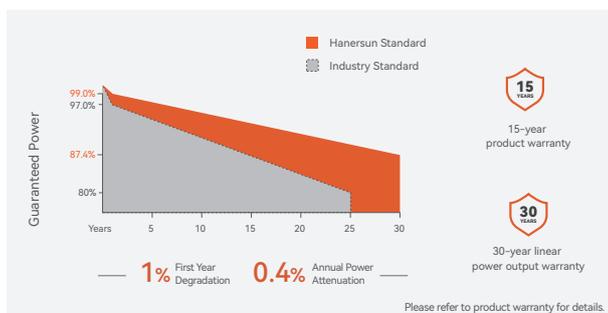

Certificates



Warranty partner



About Hanersun

Hanersun is a world-leading clean energy company, focusing on R&D, manufacturing and distribution of solar module and energy storage system, as well as comprehensive clean energy solutions. Committed to high-efficiency technologies, the company is one of the first to launch PV modules of 600W+ and 700W+ in the industry.

Electrical Characteristics (STC)

Module Type	HN21N-66HT695W	HN21N-66HT700W	HN21N-66HT705W	HN21N-66HT710W	HN21N-66HT715W	HN21N-66HT720W
Maximum Power (Pmax)	695	700	705	710	715	720
Maximum Power Voltage (Vmp)	40.20	40.40	40.60	40.80	41.00	41.20
Maximum Power Current (Imp)	17.29	17.33	17.37	17.41	17.44	17.48
Open-circuit Voltage (Voc)	48.00	48.20	48.40	48.60	48.80	49.00
Short-circuit Current (Isc)	18.30	18.34	18.38	18.42	18.46	18.50
Module Efficiency(%)	22.4%	22.5%	22.7%	22.9%	23.0%	23.2%

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.

Power Tolerance: 0~+3%

Electrical Characteristics (BNPI)

Module Type	695W	700W	705W	710W	715W	720W
Maximum Power (Pmax)	771	776	782	787	793	798
Maximum Power Voltage (Vmp)	40.20	40.40	40.60	40.80	41.00	41.20
Maximum Power Current (Imp)	19.18	19.21	19.27	19.29	19.35	19.37
Open-circuit Voltage (Voc)	48.00	48.20	48.40	48.60	48.80	49.00
Short-circuit Current (Isc)	20.28	20.32	20.37	20.41	20.46	20.50

BNPI: Irradiance: Front 1000W/m², Rear 135W/m², Cell Temperature 25°C, Air Mass AM1.5.

Mechanical Parameters

Solar Cells	N-TYPE Monocrystalline(210mm)	No. of Cells	132 [2 x (11 x 6)]
Module Dimensions	2384*1303*33mm	Weight	37.4kg
Frame	Anodized Aluminium Alloy	J-Box	IP68
Front Glass	2.0 mm, AR Coating Heat Strengthened Glass	Connector	Z4S-abcd/MC4-EVO 2A/Others
Back Glass	2.0 mm, Heat Strengthened Glass	Cables	4.0mm ² , 300/300mm (can be customized)

Operating Parameters

Operational Temperature	-40°C~+70°C
Maximum System Voltage	1500V DC (IEC)
Maximum Series Fuse Rating	35A
Bifacial	80±5%
Fire Class Rating	Class C

Temperature Ratings


Temperature Coefficient of Pmax	-0.28%/°C
Temperature Coefficient of Voc	-0.23%/°C
Temperature Coefficient of Isc	+0.045%/°C

Packaging


Pcs per Pallet: 33

Pcs per 40' HC: 594


I-V Curves of PV Module (710W)

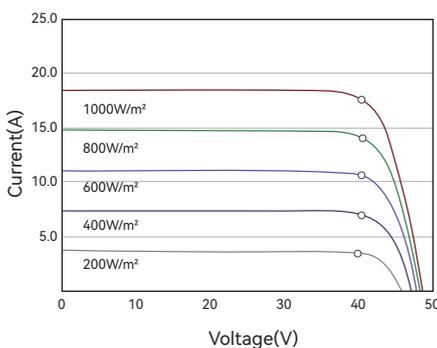



P-V Curves of PV Module (710W)

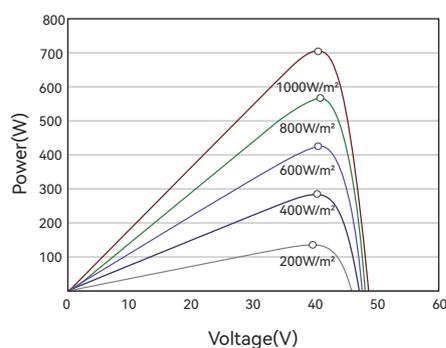

Dimensions (Unit: mm)

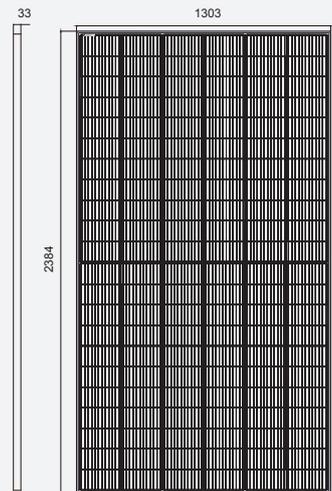

Front View

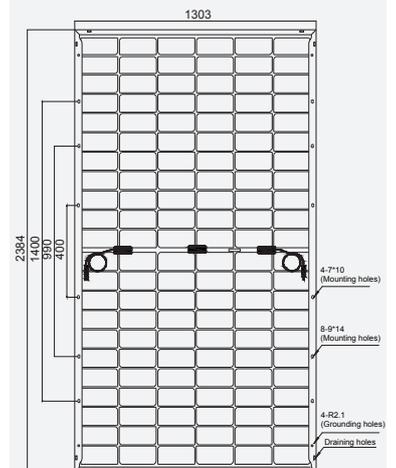

Long frame



Short frame

Back View