

NSFF200S05 36V200Ah

LiFePO₄ Lithium Battery

Longer Cycle Life: Offers up to 15 times longer cycle life and 5 times longer float/calendar life than lead acid battery.

Lighter Weight: About 40% weight of a comparable lead acid battery, save up to 60% in weight.

Quick Charge: Short charge time compared with lead acid battery.

Low Self-Discharge: Lower self-discharge compared with lead acid battery, longer storage time without recharging.

Superior Safety: Multi-protection methods built inside to protect the battery from overcharge, over discharge and short circuit situation.

High Efficient: Higher round-trip energy efficiency of the average (92%) than lead acid battery 80% (discharge from 100% to 0% and back to 100% charged).




Specifications

Nominal voltage		36V
Nominal capacity		200Ah
Dimensions	Length	326±2mm (12.83inch)
	Width	560±2mm (22.05inch)
	Height	222±2mm (8.74inch)
	Total height	222±2mm (8.74inch)
Approx. weight		61kg (133.48lbs)±2.5kg


Characteristics

Electrical Parameters (25°C)	Rated Voltage	38.4V
	Rated Capacity (C ₅)	200Ah@25°C
	Energy	7680Wh
	Months Self Discharge	<3%
	Charge Efficiency	99.5%@ 0.2C
	Discharge Efficiency	96-99%@ 1C
Terminal Diameter		M8
Internal resistance (Fully charged, 25°C)		≤40mΩ
Cycle life		>3000 cycles @ 0.2C 100%D.O.D
Capacity affected by temperature	40°C	101%
	25°C	100%
	0°C	90%
	-10°C	75%
Nominal operating temperature		25°C±3°C (77°F±5°F)
Operating temperature range	Discharge	-20°C~60°C (-4°F~140°F)
	Charge	0°C~45°C (32°F~113°F)
	Storage	0°C~40°C (32°F~104°F)
Water Dust Resistance		IP50
Charge Voltage		43.8V
Standard Charge Mode (25°C±2°C, <75%RH)		0.2CA Constant Current to 43.8V, then Constant Voltage 43.8V until the current drops to 0.02CA, before use, rest 30 minutes
Charge Current		40A
Maximum Charge Current		100A
Charge Cut off Voltage		43.8V
Continuous Discharge Current		100A
Maximum Pulse Current		300A (<500us)
Discharge Cut Off Voltage		33.6V
Communicate Protocol (optional)		Default none
SOC (optional)		Default none
Application connection		1 string 1 parallel
Mechanical	Cells	12 Strings
	Container	Metal


Outer dimensions (mm)

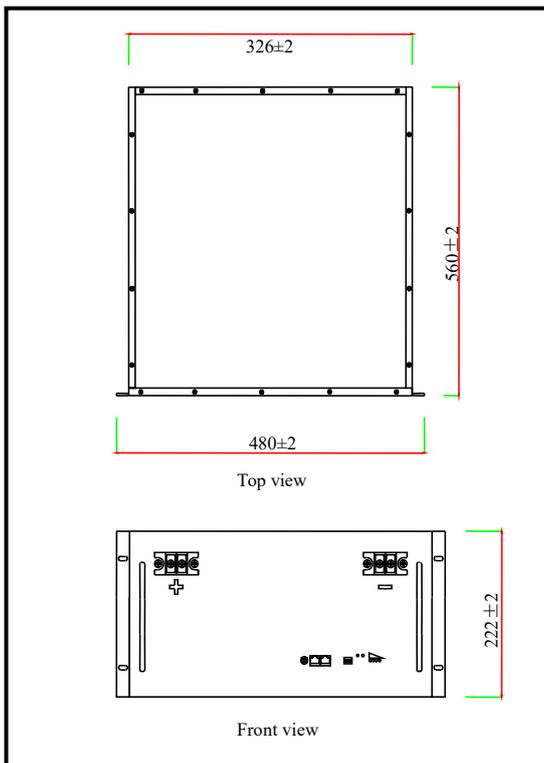


● Discharge characteristics (25°C)

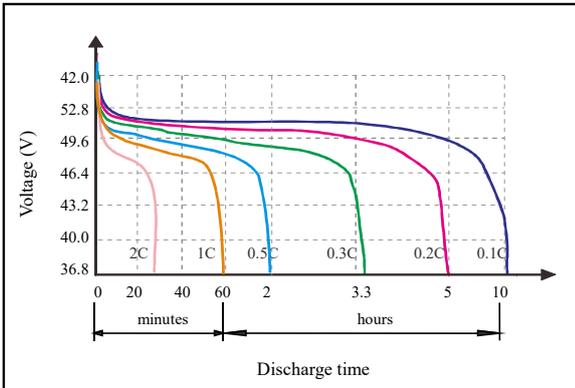


● Temperature affect on discharge characteristics (0.5C)

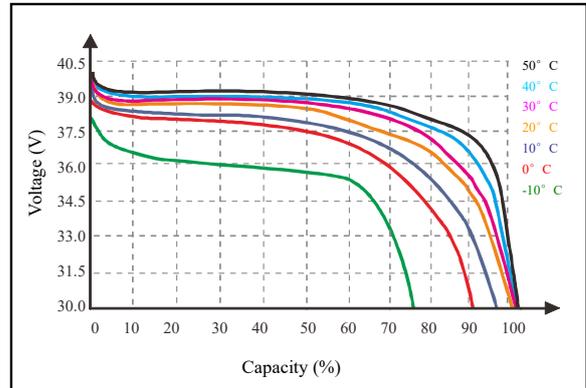


● State of Charge Curve (25°C)

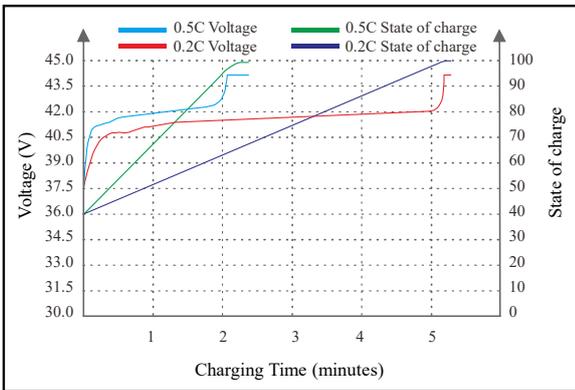


● Charge characteristics (25°C)

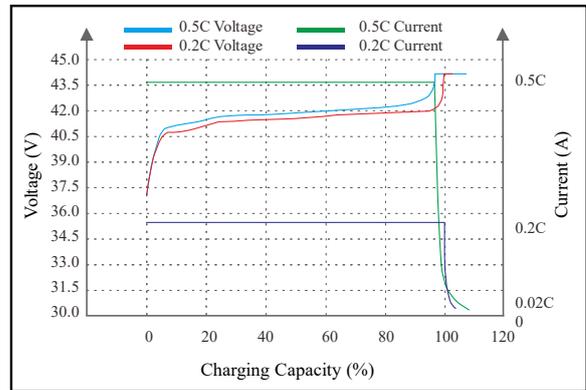

● Cycle life on D.O.D (25°C)

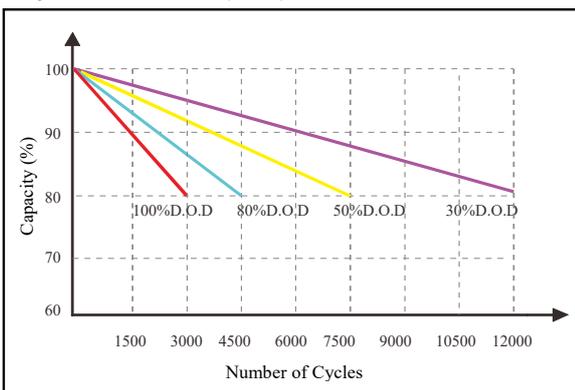

● Self Discharge Characteristics Curve

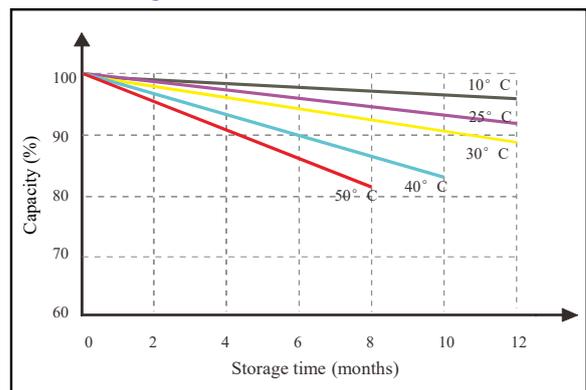

Note 2: The above curves are based on laboratory testing data @ 25°C 40%RH.