

Sunpro Max Series


TOPCon Bifacial Anti-Glare Module


445-460W | **23.02%**
Power Output | Module Efficiency

Reflected luminance at bright sunshine*: $LV, 10^\circ = 3'600 \text{ cd/m}^2$
(near normal incidence of $100'000 \text{ lx}$)

 Excellent anti-glare

 Elegant appearance

 Improved high power output

 Excellent bifacial performance

CERTIFICATE



WARRANTY

Quality Guarantee **25** years


Power Warranty **30** years

SPDG(445/460W)-N96R12

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	1762x1134x30mm
Weight	23.8kg
Cell	96 cells,N type Mono-Crystalline,182.2mm×105mm
Front glass	2.0mm,Anti-glare coating glass
Back glass	2.0mm,Heat strengthened glass
Frame	Anodized aluminum alloy
Junction box	IP68,3 bypass diodes
Output wire	4mm ²
Wire length	Line length 1100mm/customized
Connector	MC4 compatible
Packing Specification	37 pcs/Pallet;962 pcs/40' HQ

MODULE DIMENSIONS(MM)

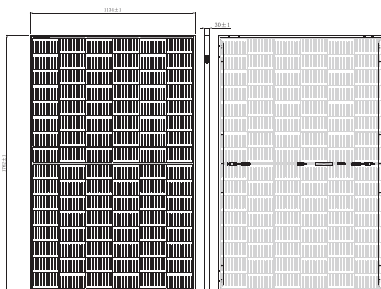

ELECTRIC CHARACTERISTICS

Model of modules	SPDG445-N96R12		SPDG450-N96R12		SPDG455-N96R12		SPDG460-N96R12	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Power (Pmax/W)	445	336.50	450	340.70	455	344.80	460	348.90
Maximum power voltage (Vmp)	29.69	27.90	29.93	28.10	30.16	28.40	30.39	28.60
Maximum power current (Imp)	14.99	12.06	15.04	12.11	15.09	12.14	15.14	12.18
Open circuit voltage (Voc)	35.54	33.70	35.80	33.90	36.06	34.20	36.30	34.50
Short circuit current (Isc)	15.85	12.77	15.90	12.80	15.94	12.84	15.99	12.88
Module efficiency	22.27%		22.52%		22.77%		23.02%	

STC (Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m², Cells Temperature25°C)

NMOT (Irradiance 800W/m², Ambient Temperature 20°C, AM1.5,Wind Speed 1m/s)

ELECTRICAL CHARACTERISTICS WITH 15% REAR SIDE POWER GAIN

Front power Pmax/W	511.75	517.50	523.25	529.00
Maximum power voltage (Vmp)	29.69	29.93	30.16	30.39
Maximum power current (Imp)	17.24	17.29	17.35	17.41
Open circuit voltage (Voc)	35.54	35.80	36.06	36.30
Short circuit current (Isc)	18.24	18.29	18.33	18.39


OPERATING PARAMETERS

Power tolerance (W)	(0~+5W)
Maximum system voltage (V)	1500V
Maximum rated fuse current (A)	30A
Current operating temperature (C)	-40~+85°C
Mechanical load	+5400Pa/-2400Pa


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.045% / °C
Temp. Coeff. of Voc (TK Voc)	-0.25% / °C
Temp. Coeff. of Pmax (TK Pmax)	-0.30% / °C
Normal Operating Cell Temperature	45±2°C

LINEAR PERFORMANCE GUARANTEE FOR 30 YEARS

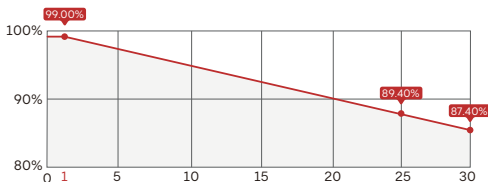

MAXIMUM REFLECTION

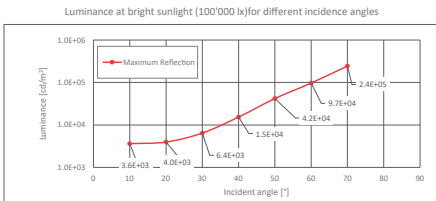

Zhejiang Sunpro Power Technology Co., Ltd

Add: Qinggang Industrial Zone, Yuhuan City, Zhejiang Province

Tel: +86 0576-80730906 E-mail: info@sunpropower.com Website: www.sunpropower.com

*The above parameters are for reference only, and the actual parameters of the factory shall prevail