


ECO DELTA MBB Mono Half-cut 182 Cell Double-glass-bifacial PV Module

ECO-530-550M-72LHC-DGDF

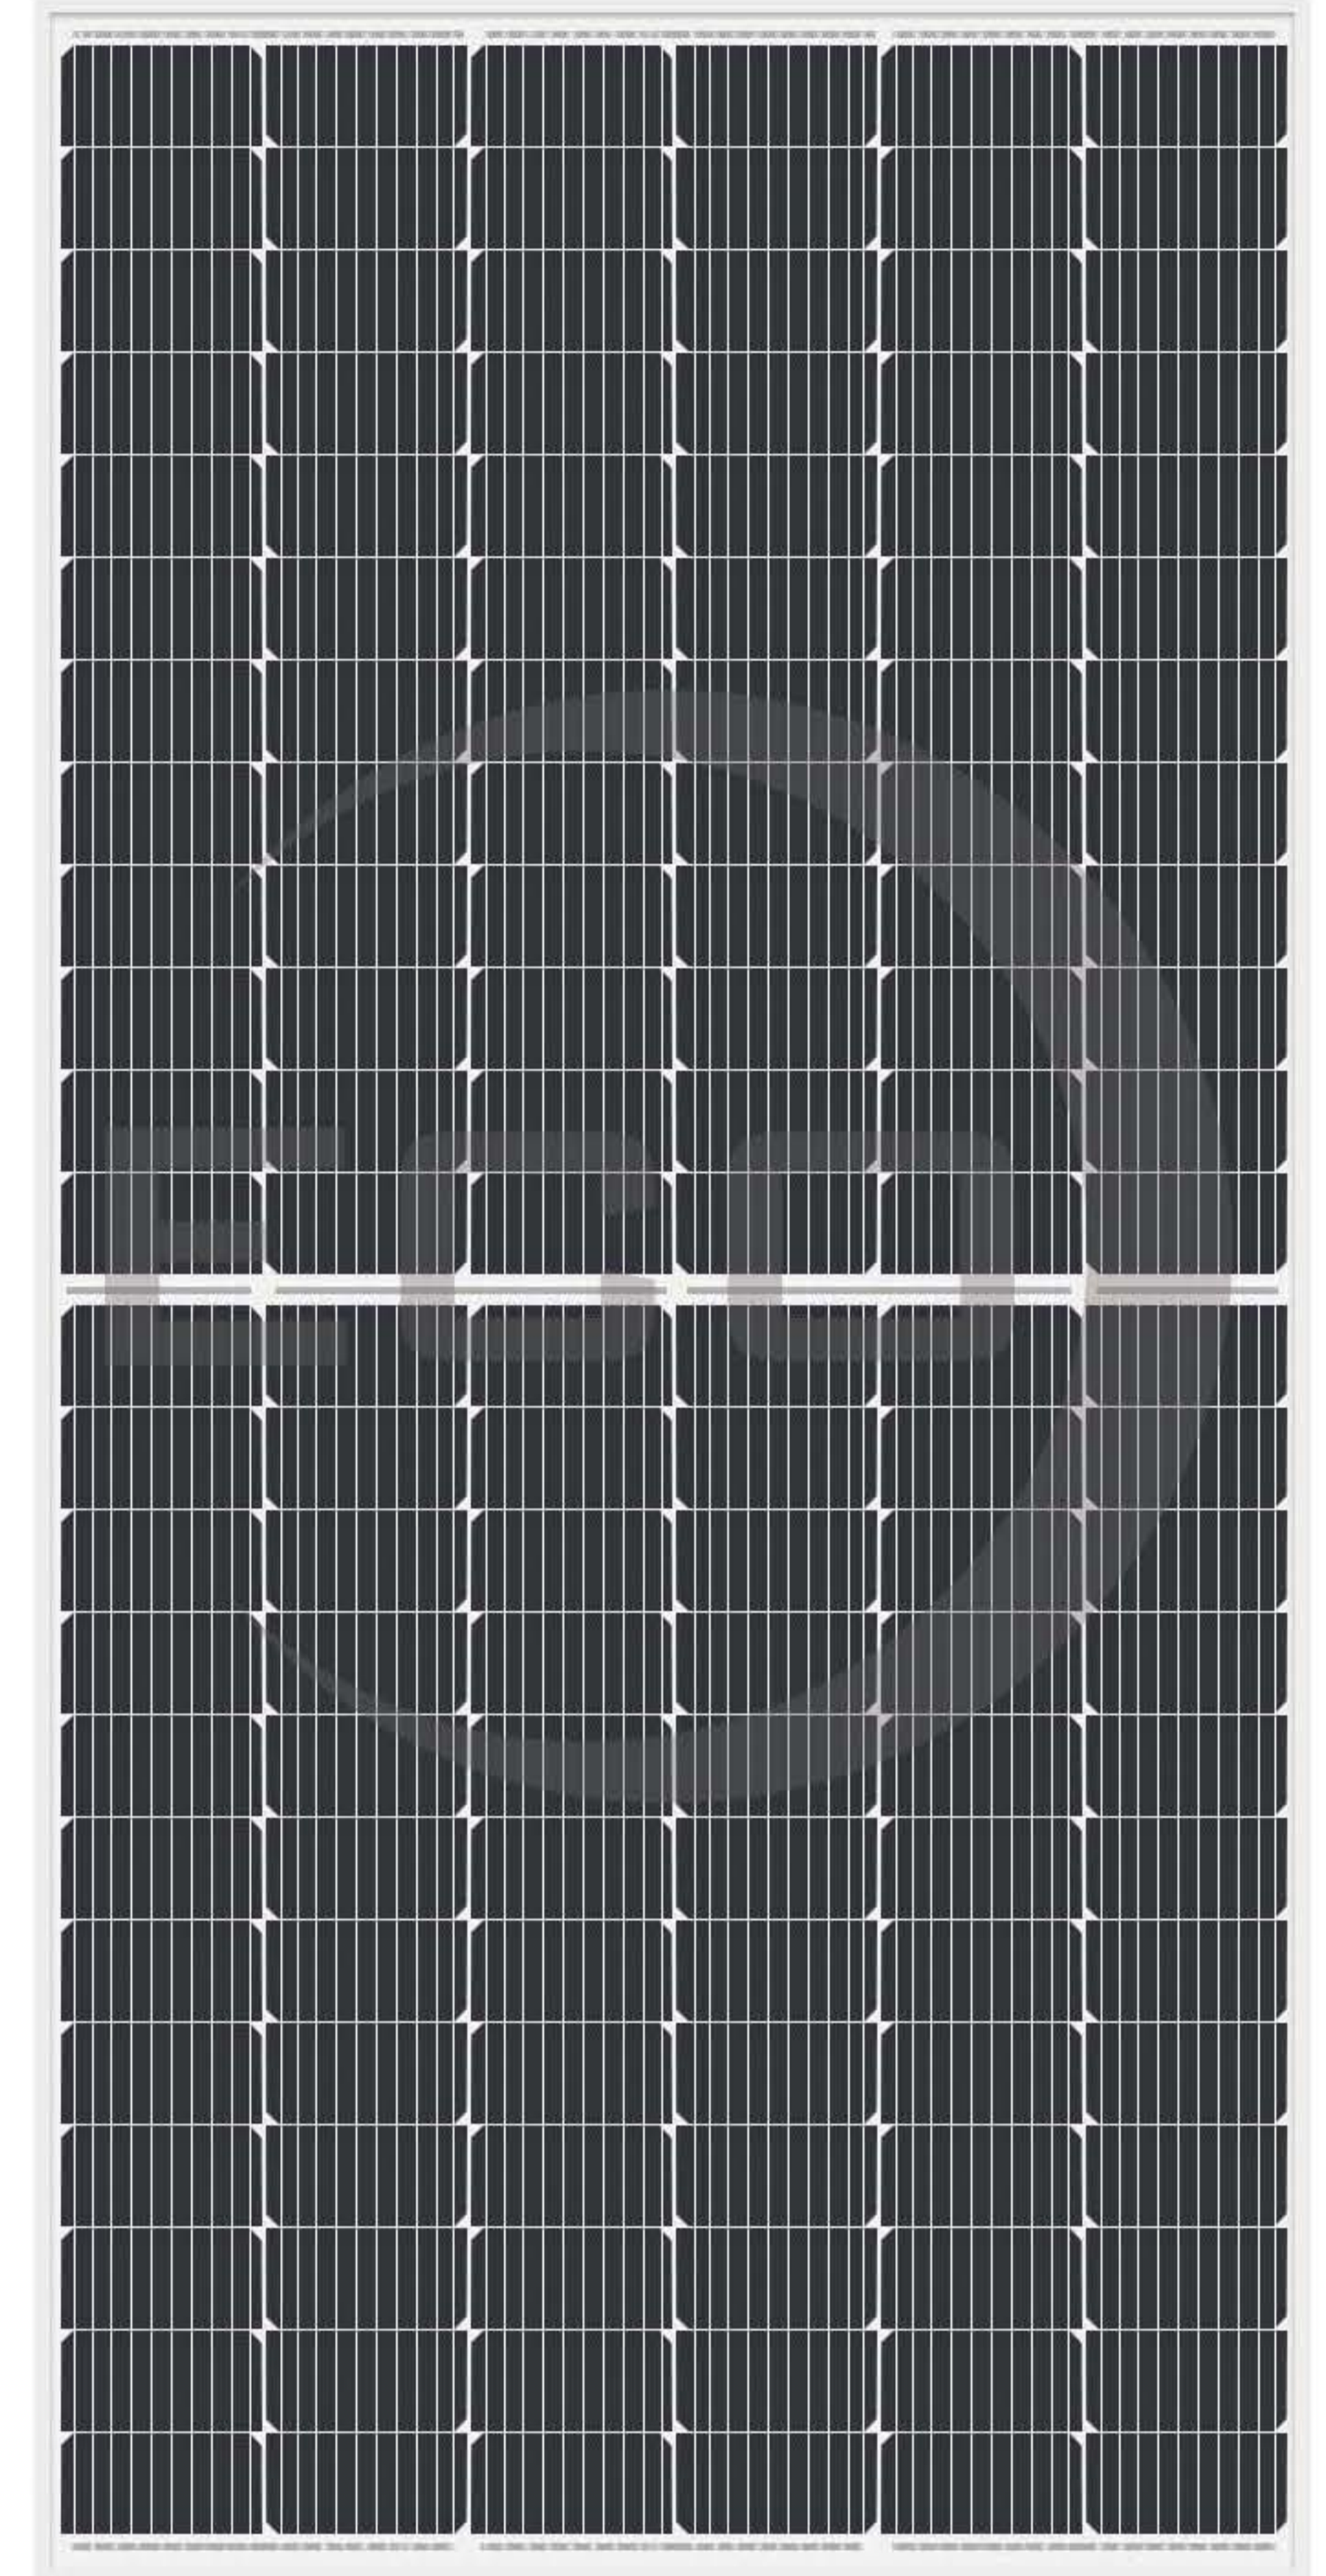

INNOVATIONAL HALF-CELL TECHNOLOGY

Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.



OPTIMIZED BUSBAR NUMBER

New circuit design
Lower internal current, lower internal loss



INNOVATIVE PERC CELL TECHNOLOGY

Excellent cell efficiency and output.



REDUCE SHADOW LOSS

Effectively reduces the effect of shadow on the module surface.



REDUCE INTERNAL MISMATCH LOSS

Reduces mismatch loss and improves output.



PASSED HAIL TEST


Certified to hail resistance: ice ball size (d=45mm) and ice ball velocity (v=30.7m/s).



PID RESISTANCE

Excellent PID resistance at 96 hours (@85°C/85%) test, and also can be improved to meet higher standards for the particularly harsh environment

LINEAR PERFORMANCE WARRANTY

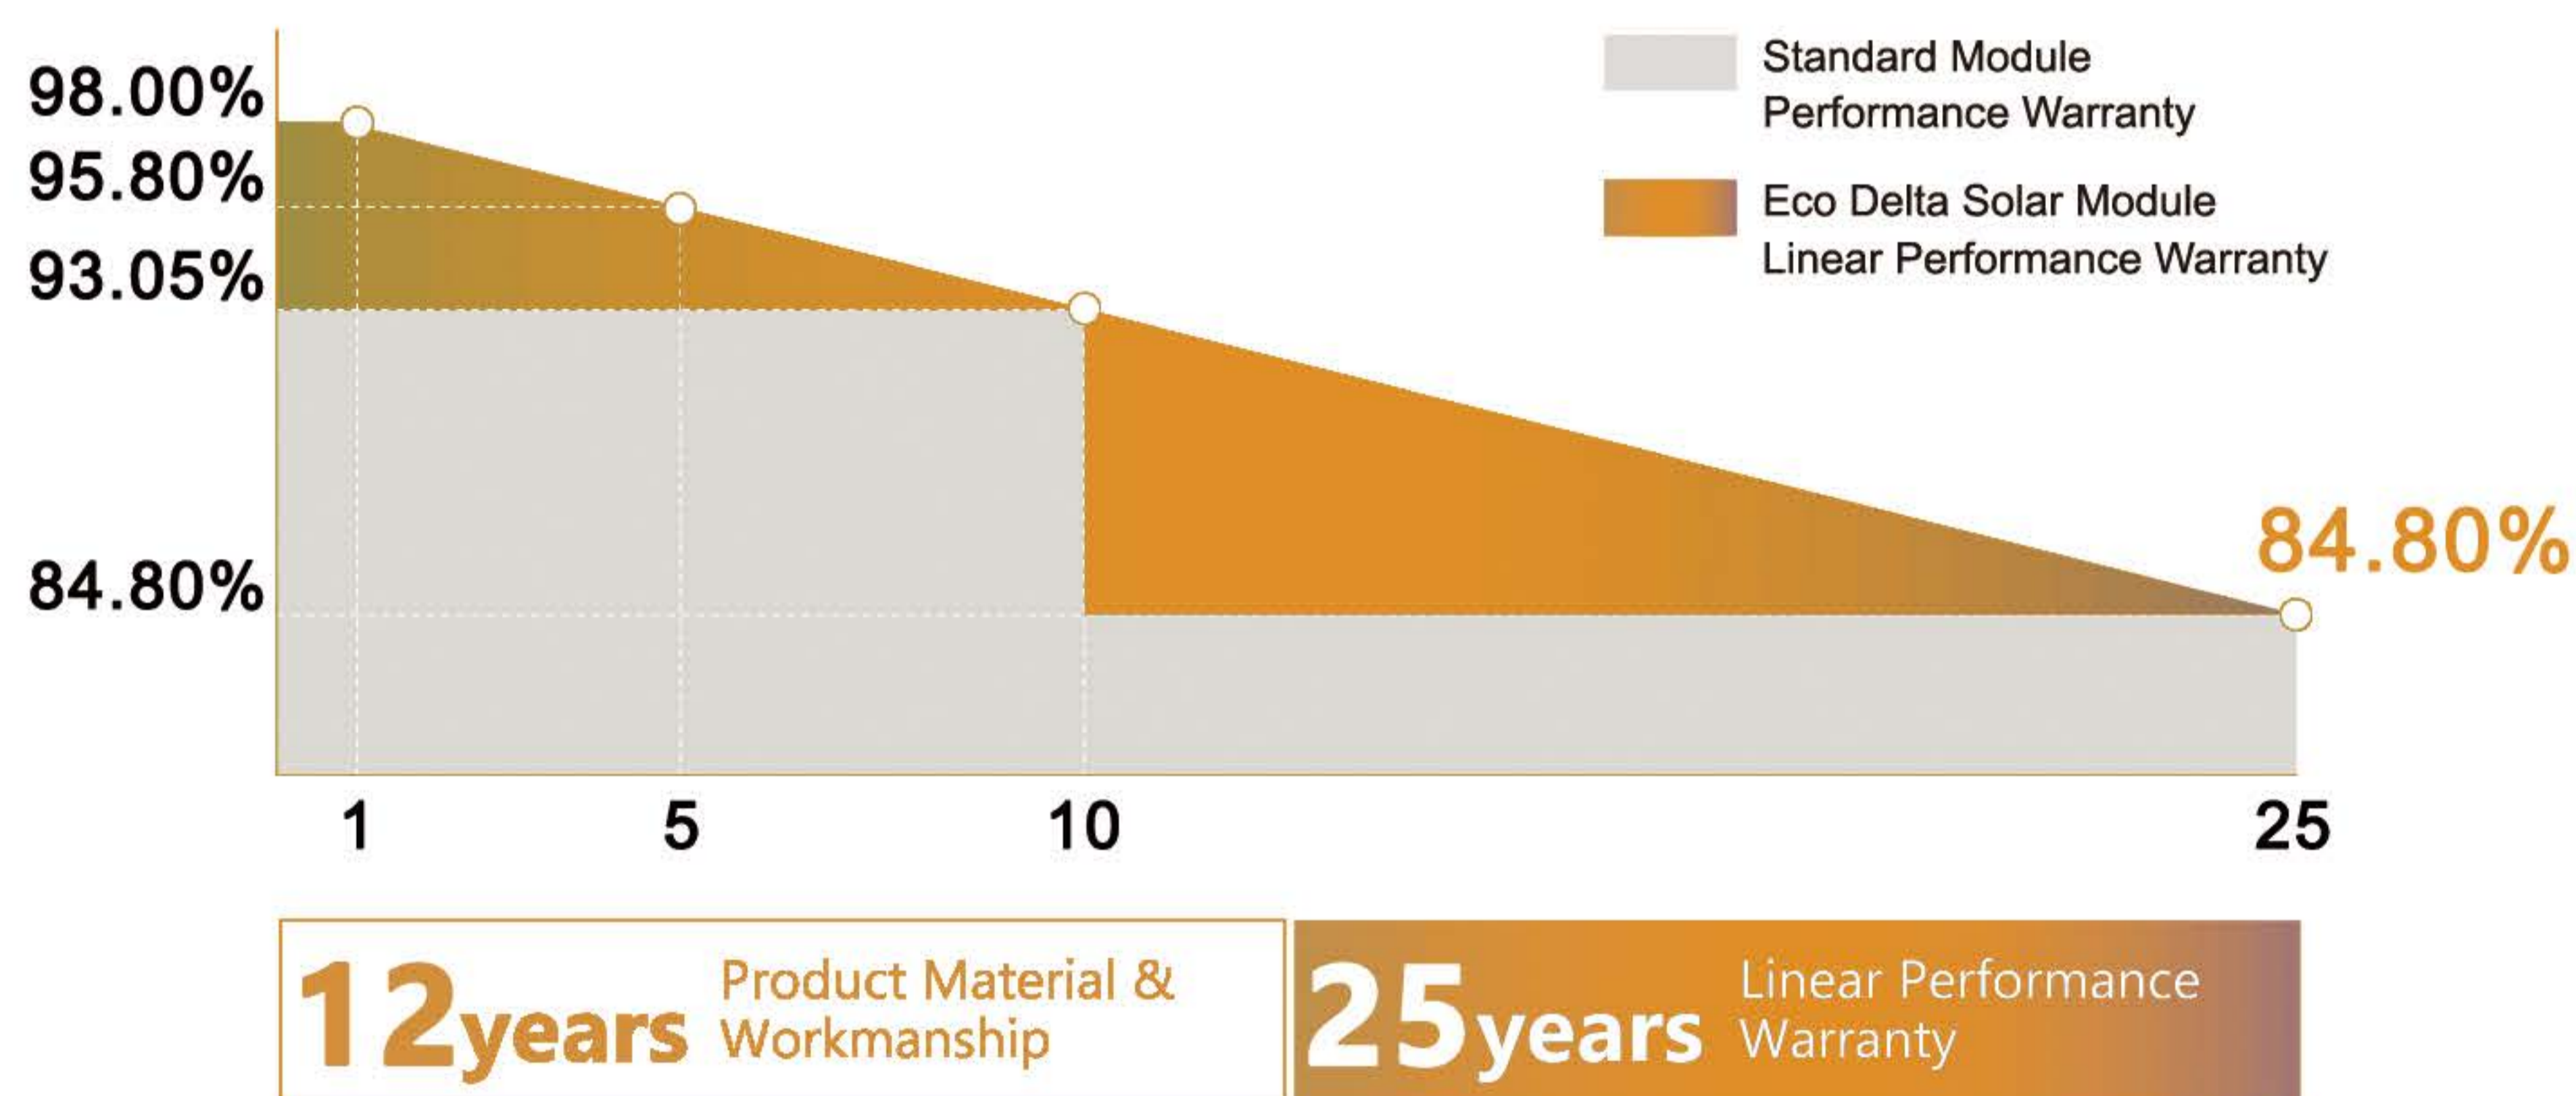

QUALITY WARRANTY

Eco Delta guarantees that defects will not appear in materials and workmanship defined by IEC61215 or IEC61730 under normal installation, use and maintenance as specified in Eco Delta's installation manual for 12 years from the warranty starting date.

ISO9001
ISO14001
OHSAS18001



About Eco Delta

Eco Delta Power Co., Ltd specializes in research, development, production, and sales of solar PV products as well as provision of related services and provides customers around the world with high-quality PV products.

www.ecodeltapower.com

ECO DELTA MBB Mono Half-cut 182 Cell Double-glass-bifacial PV Module

ECO-530-550M-72LHC-DGDF



ELECTRICAL DATA @ STC		ECO-530M-72 LHC-DGDF	ECO-535M-72 LHC-DGDF	ECO-540M-72 LHC-DGDF	ECO-545M-72 LHC-DGDF	ECO-550M-72 LHC-DGDF
Peak Power(Pmax)	(W)	530	535	540	545	550
Maximum Power Voltage (Vmp)	(V)	41.57	41.80	42.03	42.26	42.49
Maximum Power Current(Imp)	(A)	12.75	12.80	12.85	12.90	12.95
Open-circuit Voltage (Voc)	(V)	49.63	49.76	49.89	50.02	50.15
Short-circuit Current(Isc)	(A)	13.50	13.55	13.60	13.65	13.70
Module Efficiency	(%)	20.47	20.67	20.86	21.05	21.25
Operating Temperature		-40°C~+85°C				
Maximum System Voltage		□1500V				
Maximum Series Fuse Rating		25A				
Power Tolerance		0~+3%				

*STC (Standard Test Condition): Irradiance 1000W/ m² , Module Temperature 25°C, AM 1.5

ELECTRICAL DATA @ NMOT		ECO-530M-72 LHC-DGDF	ECO-535M-72 LHC-DGDF	ECO-540M-72 LHC-DGDF	ECO-545M-72 LHC-DGDF	ECO-550M-72 LHC-DGDF
Peak Power(Pmax)	(W)	401	405	409	413	417
MPP Voltage (Vmp)	(V)	38.45	38.65	38.88	39.07	39.27
MPP Current(Imp)	(A)	10.43	10.48	10.52	10.57	10.62
Open Circuit Voltage (Voc)	(V)	46.16	46.28	46.40	46.52	46.64
Short Circuit Current(Isc)	(A)	11.05	11.09	11.13	11.17	11.21

*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m² , Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE CHARACTERISTICS

Temperature coefficient of Pmax	-0.36%/k
Temperature coefficient of Voc	-0.26%/k
Temperature coefficient of Isc	0.04%/k
NMOT	45±2°C

MECHANICAL DATA

Cell Type	Mono-Crystalline, 182*91mm
Cell Arrangement	144pcs (2(6*12))
Dimension (L*W*H)	2285 x 1133 x 35 mm
Weight	31.8kg
Front Cover	2mm Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 Bypass Diodes
Cable Type	4mm ²
Length of Cable	1200mm
Connector	Compatible with MC4 PV Connector

OPTIONAL


Frame	□Black
Backsheet	□2mm Transparent Glass
Connector	□Original MC4
Cable	□Customized
Module Size	□Customized

PACKING MANNER

Packing Type	40'HQ
Piece/Pallet	30
Piece/Container	600

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, ECO DELTA POWER CO., LTD Reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Current-Voltage Curve under different irradiance

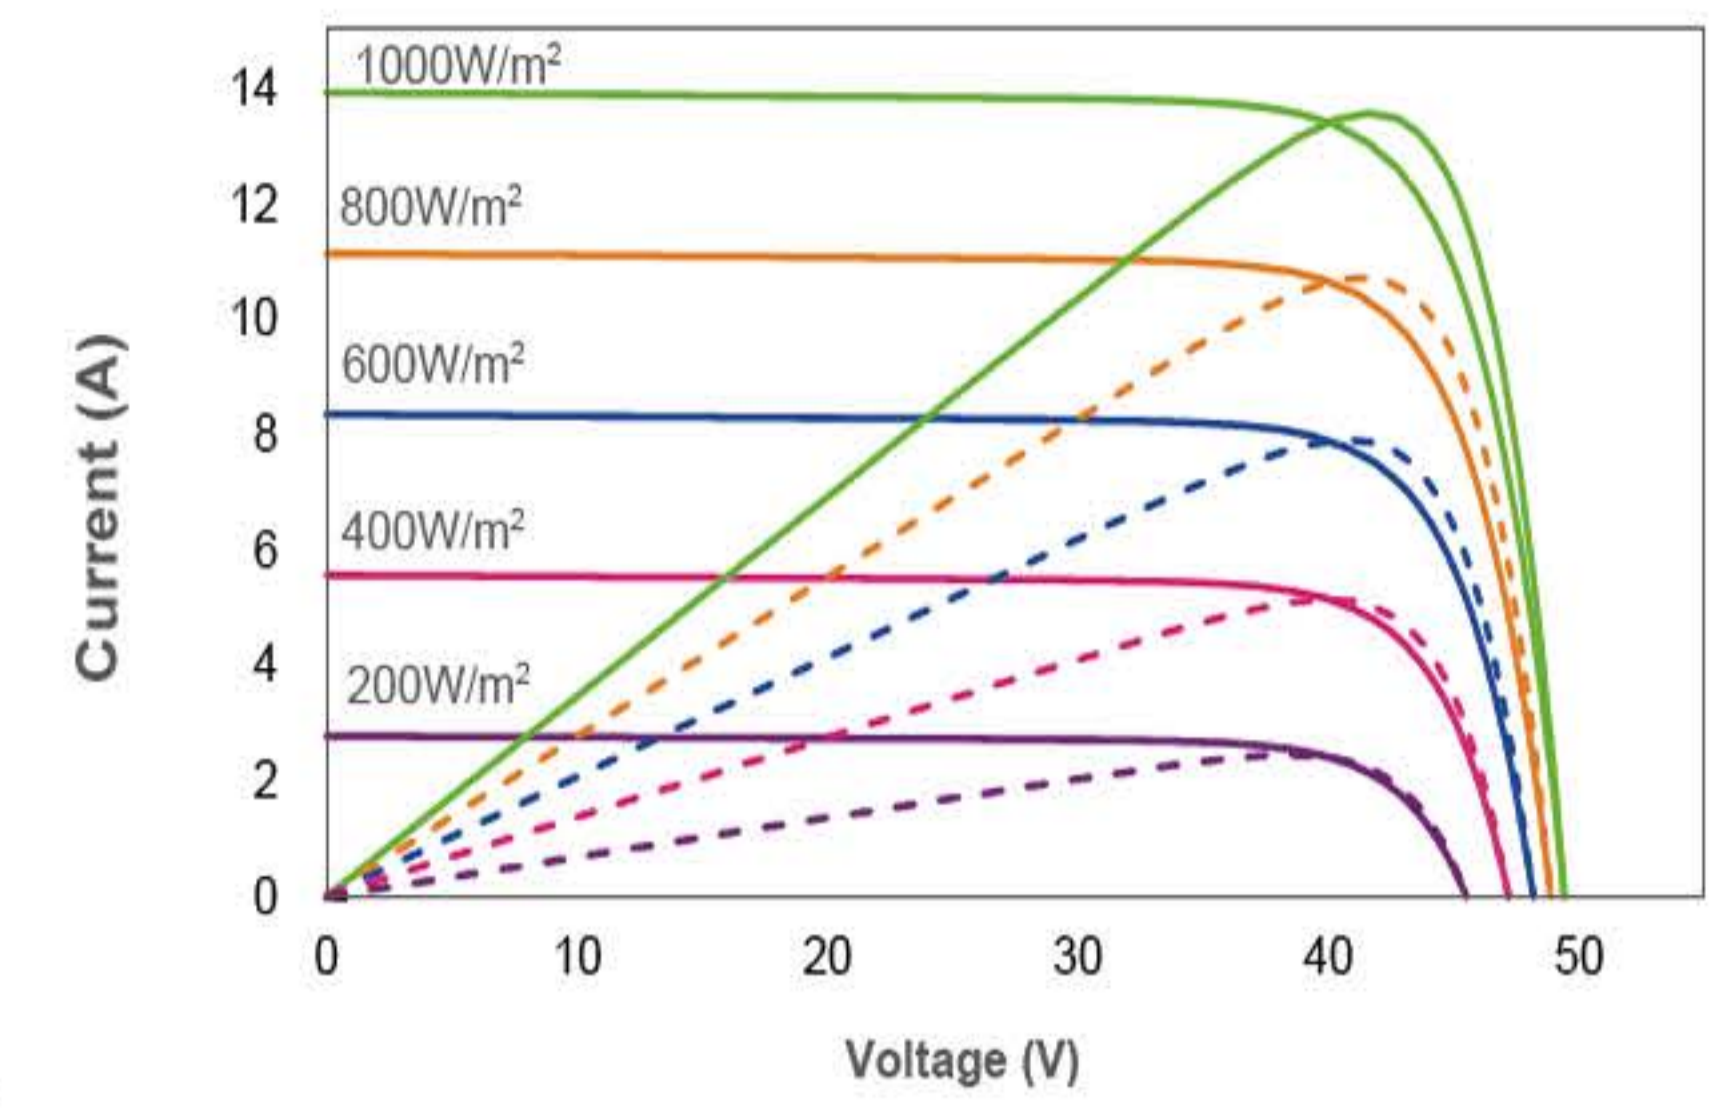

Current-Voltage Curve under different working temperatures

