


SunVivo PM060MW2

Mono-Crystalline Photovoltaic Module



Power Range
310 ~ 315 Wp

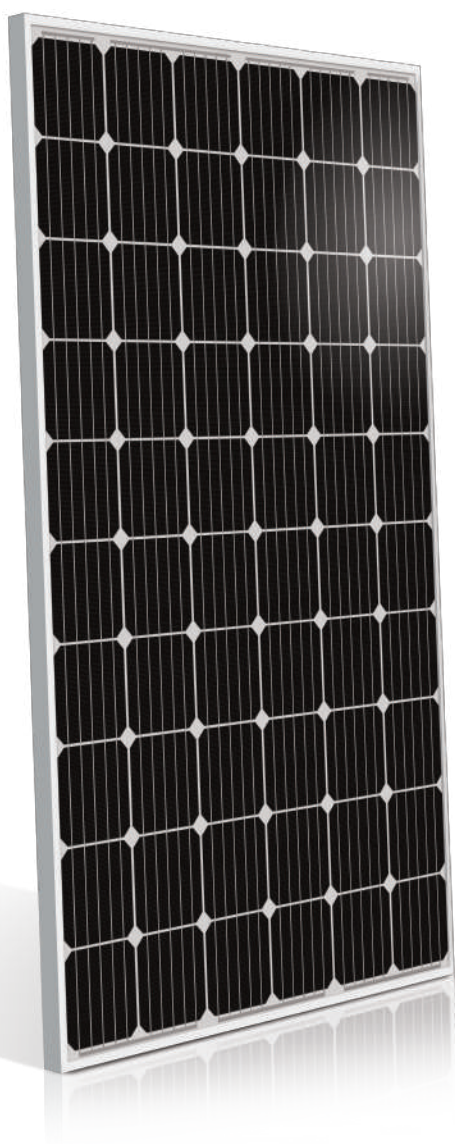

Strong Wind Resistance
Dynamic mechanical loading 4 times higher
than the IEC requirement



PID-Resistance
Certified high PID resistance passing 1000-
hour tough environmental test



Superior Weak Light Performance
Improved absorption of long wavelength light



Enhanced Salt Mist and Humidity
Resistance
12 times more salt-mist resistant and
40% more moisture exclusion

SunVivo PM060MW2 (310 ~ 315 W_p)

Electrical Data (STC)

Nominal Power P _N	310W	315W
Module Efficiency	19.1%	19.4%
Nominal Voltage V _{mp} (V)	33.10	33.30
Nominal Current I _{mp} (A)	9.38	9.48
Open Circuit Voltage V _{oc} (V)	40.50	40.80
Short Circuit Current I _{sc} (A)	10.02	10.13
Maximum Tolerance of P _N	0 / +3%	

• Above data are the effective measurement at Standard Test Conditions (STC)
 • STC: irradiance 1000 W/m², spectral distribution AM 1.5, temperature 25 ± 2 °C, in accordance with EN 60904-3
 • Measurement tolerances: STC ± 3 %

Electrical Data (NOCT)

Nominal Power P _N	234W	238W
Nominal Voltage V _{mp} (V)	31.56	31.75
Nominal Current I _{mp} (A)	7.41	7.50
Open Circuit Voltage V _{oc} (V)	38.22	38.50
Short Circuit Current I _{sc} (A)	8.10	8.19

• Above data are the effective measurement at Normal Operation Cell Temperature (NOCT)
 • NOCT: irradiance 800 W/m², AM 1.5, air temperature 20 °C, wind speed 1 m/s

Temperature Coefficient

NOCT	42 ± 2 °C
Typ. Temperature Coefficient of P _N	-0.39% / °C
Typ. Temperature Coefficient of V _{oc}	-0.29% / °C
Temperature Coefficient of I _{sc}	0.06% / °C

Mechanical Characteristics

Dimensions (L x W x H)	1640 x 992 x 40 mm (64.57 x 39.05 x 1.57 in) *
Weight	18.5 kg (40.79 lbs)
Front Glass	High transparent solar glass (tempered), 3.2 mm (0.13 in)
Cell	60 monocrystalline solar cells
Back Sheet	Composite film
Frame	Anodized aluminum frame
Junction Box	IP-68 rated with 3 bypass diodes
Connector Type	1000V : MC4 KST4 ; KBT4 - 1 x 4 mm ² (0.04 x 0.16 in ²)

* Module Dimension (L x W) Tolerance: ± 2 mm (0.079 in)

Operating Conditions

Operating Temperature	-40 ~ +85 °C
Ambient Temperature Range	-40 ~ +45 °C
Max. System Voltage	1000V
Serial Fuse Rating	15 A
Max. Snow / Wind Load	5400 Pa / 2400 Pa
Max. Dynamic Mechanical Load	4000 Pa
Safety Class	II

Warranties and Certifications

Product Warranty	Maximum 10 years for material and workmanship
Performance Guarantee	Guaranteed linear degradation to 80% for 25 years ^{*1}
Certifications	According to IEC/EN 61215 and IEC/EN 61730 guidelines ^{*2}


*1: Please refer to warranty letter for detail

*2: Please confirm other certifications with official dealers


Packing Configuration

Container	20' GP	40' GP	40' HQ
Pieces per Pallet	26	26	26
Pallets per Container	6	14	28
Pieces per Container	156	364	728

Dimensions mm (inch)

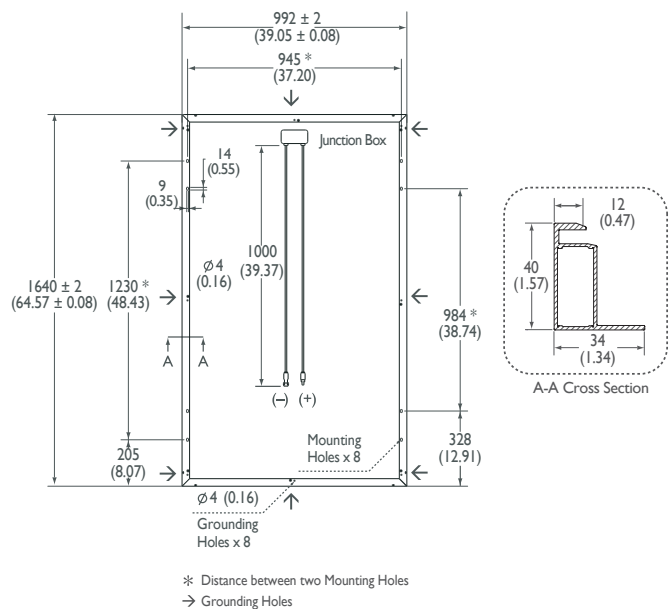

I-V Curve

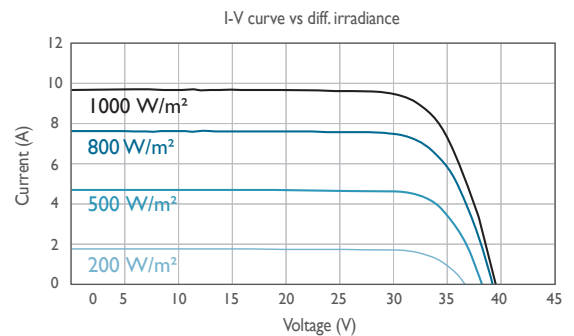

Current/voltage characteristics with dependence on irradiance and module temperature.

This datasheet complies with the EN 50380 requirements.



solar.AUO.com



About AU Optronics

AU Optronics (AUO) is one of the world's leading providers of optoelectronic solutions. In addition to its strengths in product and technological innovation, AUO stresses its commitment to going green and to utilizing manufacturing excellence to develop reliable and high quality energy solutions for residential, commercial, and utility segments.

© Copyright April 2020 AU Optronics Corp. All rights reserved. Information may change without notice. This datasheet is printed with Soy Ink.