

# AU-144MH

POWER RANGE

400W~410W


CELL SIZE

158.75\*79.375mm




## JUNCTION BOX

Waterproof protection grade: IP67/IP68  
Safety Level: Class II  
Maximum System Voltage: 1500V/1000V  
outstanding waterproof level ·  
Effectively resist harsh environments



## Frame

Strong machinical load  
resistance up to 5400Pa  
Anodic oxidation layer resistant to  
chemical corrosion available  
in silver and black



5BB



9BB



## Half-cut Technology

New circuit design, lower internal current and  
lower internal resistance loss



## Significantly avoiding heat spot

The unique circuit design to reduce the temperature  
of heat spot significantly, so that to reduce the power loss  
and then increase the output of modules.



## Lower cost

Increasing power generation can reduce the  
cost per kilowatt-hour



## Excellent performance of PID resistance


The performance of PID resistance (Potential Induced  
Degradation) passed the standard of TUV Nord.

## QUALIFICATIONS AND CERTIFICATES



· IEC61215 / · IEC61730

## WARRANTY

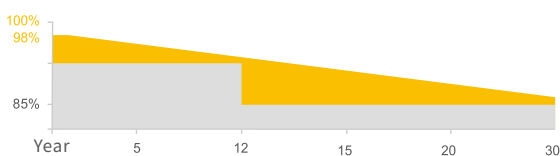

12  
YEARS

Guarantee on product material and workmanship

30  
YEARS

Linear Power output warranty

AUSTA ENERGY  
[www.austagroup.com](http://www.austagroup.com)


AUSTA ENERGY established in 2008, is a high-tech enterprise integrating R&D, production and sales of solar energy products. It is committed to the overall solution of distributed photovoltaic system and provides services from consulting, design, construction, financing to intelligent operation and maintenance.

AUSTA has 3 production sites in China and branches and representative offices in more than 10 countries overseas. Products include solar cells, modules, On/Off grid solar system, solar pump and other solar related applications. Our products have passed many international certifications such as TUV, MCS, CEC, IEC, ISO, CE, CQC and so on. With excellent quality, our products are exported to more than 100 countries of the world.

Since its establishment, AUSTA has always followed the idea of "Smart energy, Lightning future". It has followed the steps of "the Belt and Road Initiative", we bring bright light to the countries and people who are short of electricity. Sharing the concept of modern civilization, and building a green home together.

## PV DRAWINGS

Unit:mm

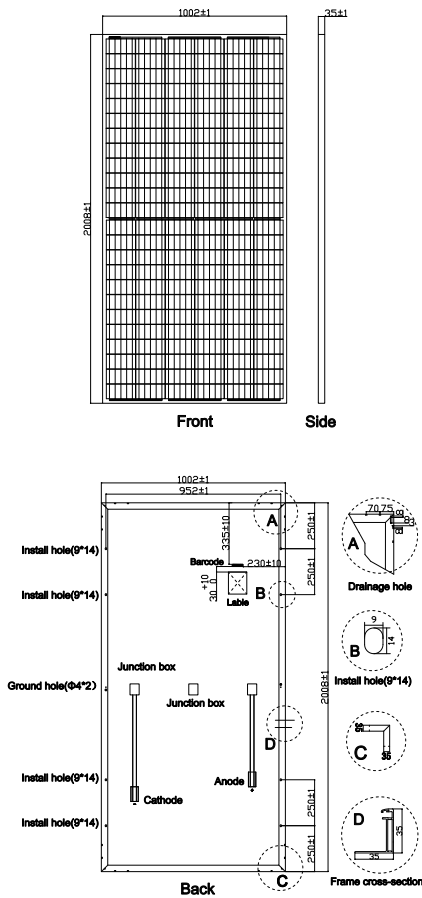

## ELECTRICAL DATA (STC)

Model Type	AU-400W36MH	AU-405W36MH	AU-410W36MH
Peak Power(Pmax)	400.00	405.00	410.00
Maximum Power Voltage(Vmp)	40.50	40.70	40.90
Maximum Power Current(Imp)	9.88	9.96	10.03
Open Circuit Voltage(Voc)	49.20±3%	49.30±3%	49.50±3%
Short Circuit Current(Isc)	10.48±3%	10.56±3%	10.63±3%
Module Efficiency( % )	19.88	20.12	20.37

\* STC: irradiance 1000 W/m<sup>2</sup>, AM 1.5, and cell temperature of 25°C

## ELECTRICAL DATA (NOCT)



Model Type	AU-400W36MH	AU-405W36MH	AU-410W36MH
Peak Power(Pmax)	298.40	302.20	305.80
Maximum Power Voltage(Vmp)	37.60	37.70	37.90
Maximum Power Current(Imp)	7.94	8.01	8.07
Open Circuit Voltage(Voc)	45.80±3%	45.90±3%	46.10±3%
Short Circuit Current(Isc)	8.46±3%	8.52±3%	8.58±3%

\* NOCT: irradiance 800 W/m<sup>2</sup>, AM 1.5, ambient temperature 20°C, wind speed 1 m/s

## TEMPERATURE & MAXIMUM RATING

Maximum System Voltage (V)	1500 /1000V
Maximum Series Fuse Rating (A)	20 A
Power Tolerance	0~+3 W
Pmax Temperature Coefficients (W/°C)	-0.360 %/°C
Voc Temperature Coefficients (V/°C)	-0.260 %/°C
Isc Temperature Coefficients (A/°C)	+0.043 %/°C
NOCT Nominal Operating Cell Temperature (°C)	45±2 °C
Operating and Storage Temperature (°C)	-40~+85 °C

## IV CURVE (400W)

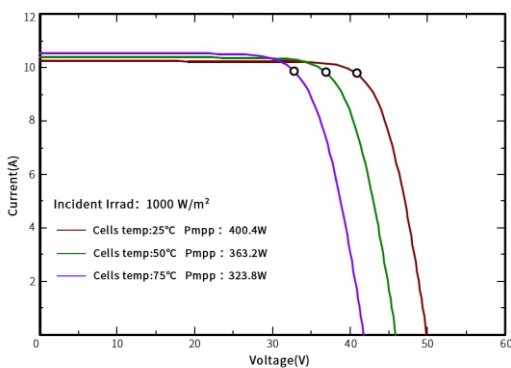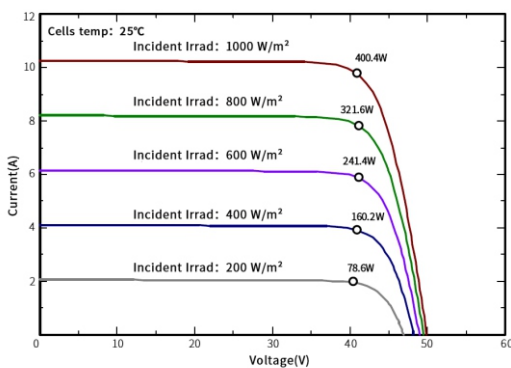

## MECHANICAL CHARACTERISTICS

Cell Type	158.75*79.375 Mono
No. of Cells	144 (12*12)
Dimensions	2008*1002*35mm
Weight	22.50kg
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP67/IP68 3diodes
Output cables	4mm <sup>2</sup> cable 35cm (Including MC4 connector)
MaxWind Load/Snow Load	2400Pa/5400Pa

## PACKING WAY

20FT container	10 Packages/310pcs
40HQ container	22 Packages/748pcs

**Austa**



ZHEJIANG AUSTA GREEN ENERGY TECHNOLOGY CO., LTD  
ADD: NO.128 Haichuan Rd, Jiangbei Dist., Ningbo, China

Tel : 86-574-87915068  
Cell: 86-13566302808  
E-mail : sales@austagroup.com

The company reserves the right of final interpretation, November 2020 edition