




#### **ENGINEERING DRAWING (mm)**

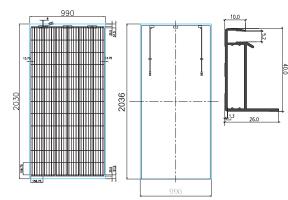


# ELECTRICAL DATA | STC\*

SPECIFICATIONS	SOLAR ROOF BROWN ASPHALT
Nominal Max. Power (Pmax)	310W
MPP Operating Voltage (Vmp)	40.6V
MPP Operating Current (Imp)	7.64A
Open Circuit Voltage (Voc)	48.5V
Short Circuit Current (Isc)	8.03A
Cell Efficiency	22% - 22.5%
Operating Temperature	-40°C ~ +85°C
Max. System Voltage	1000V (IEC/UL)
Max. Series Fuse Rating	20A
Application Classification	Class A

 $^{*}$  Under Standard Test Conditions (STC) of irradiance of 1000 W/m2, spectrum AM 1.5 and cell temperature of 25°C.

### LINEAR PERFORMANCE WARRANTY

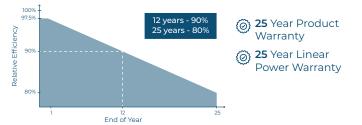

SOLAR ROOF


Brown Asphalt Facing High Efficiency Mono Module 310W 1000V


## MECHANICAL DATA

SPECIFICATIONS	SOLAR ROOF BROWN ASPHALT
Cell Type	Mono-crystalline
Cell Arrangement	72 [12x6]
Dimensions	2036x996x40mm
Front Cover	3.2 mm tempered glass
Frame	Anodized aluminum alloy black frame
Weight	22kg
J-Box	IP68, 3 bypass diodes
Cable	4mm <sup>2</sup> , 12 AWG (UL)
Cable Length (Including Connector)	300mm, 1000mm, 1200mm
Connector	Staubli MC4

#### **TEMPERATURE CHARACTERISTICS**

SPECIFICATIONS	SOLAR ROOF BROWN ASPHALT
Temperature Coefficient Pmax	-0.36% / °C
Temperature Coefficient Voc	-0.27% / °C
Temperature Coefficient Isc	0.036% / °C
Nominal Module Operating Temperature	42 ± 3°C





- Datasheet is subjected to change without prior notice, always obtain the most recent version of the datasheet.

- Caution: For professional use only, the installation, handling, and cleaning of PV modules should only be performed by qualified professionals.

Learn More:	
mitrex.com	
🔀 info@mitrex.com	

Headquarters: 41 Racine Rd., Toronto, ON M9W 2Z4, Canada
+1 (416) 497 7120
+1 (855) 254 0214 (Toll Free) West USA Location: 10880 Wilshire Blvd Suite 1101, Los Angeles, CA 90024, USA +1 (323) 301 7978 East USA Location: () 1 Rockefeller Plaza Fl 11, New York, NY 10020, USA

🜭 +1 (646) 583 4486