

SP250M-72


High Efficiency Monocrystalline PV Module

Electrical Data	SP250M-72
Maximum power (Pmax)	250W
Voltage at Pmax (Vmp)	37.60V
Current at Pmax (Imp)	6.65A
Open-circuit voltage (Voc)	46.20V
Short-circuit current (Isc)	7.18A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/ °C
Temperature coefficient of power	-(0.5±0.05)%/ °C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	+ 3%

* STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

* NOCT:Nominal operating cell temperature (the data is only for reference)

Dimensions Of PV Module

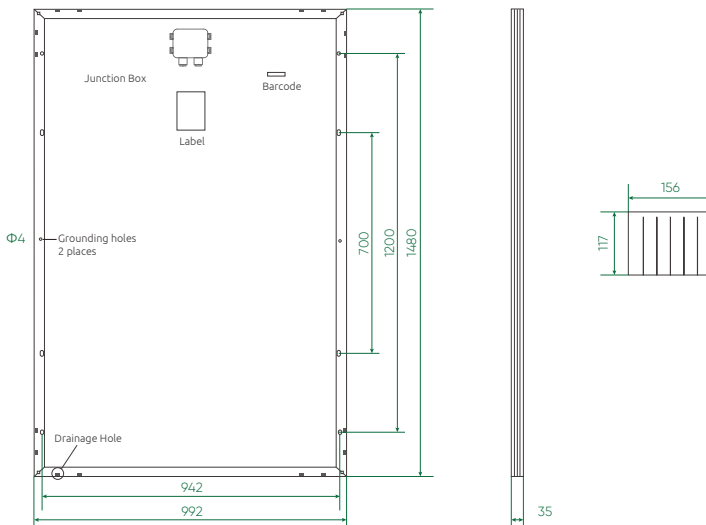

*All Dimensions in mm

Specifications	SP250M-72
Cells	Mono 117×156 mm
No. of cells and connections	72(6×12)
Module dimension	1480×992×35 mm
Weight	17 kg
No. of Mounting Holes	8
No. of Waterspout Holes	16



25 25-year guarantee for 80% rated power

10 10-year product workmanship warranty

10 10-year guarantee for 90% rated power

Features

- Excellent power generation performance
- Nominal 12V DC for standard output.
- Heavy-duty anodized frames.
- High transparent low-iron,tempered glass.

Applications

- Traffic & Safety
- Federal Government
- Agricultural
- Security
- Telecommunications
- Water and Wastewater
- Weather & Environmental Monitoring
- RV Camper
- Emergency Power
- Telemetry

Characteristics

