


# LR4-72HPH 420~440M

Hi-MO 4m

**High Efficiency  
Low LID Mono PERC  
with Half-cut Technology**

10-year Warranty for Materials and Processing;  
25-year Warranty for Extra Linear Power Output

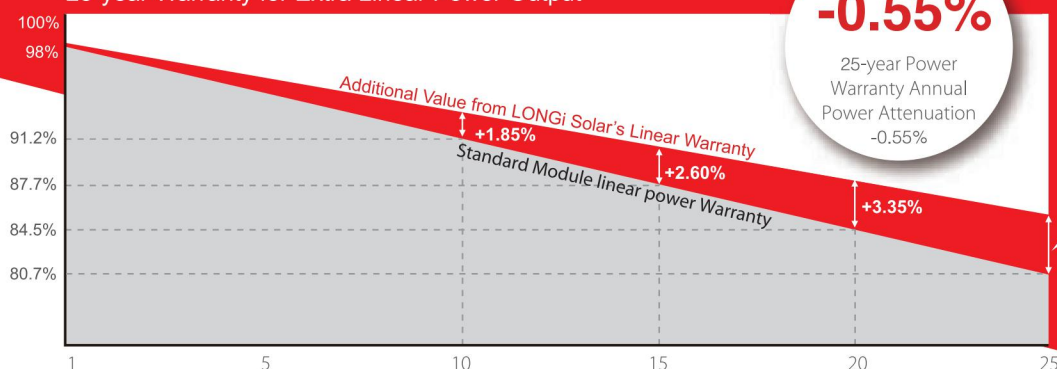

**-0.55%**

25-year Power  
Warranty Annual  
Power Attenuation  
-0.55%

**+4.10%**

## Complete System and Product Certifications

IEC 61215, IEC61730, UL1703

ISO 9001:2008: ISO Quality Management System

ISO 14001: 2004: ISO Environment Management System

TS62941: Guideline for module design qualification and type approval

OHSAS 18001: 2007 Occupational Health and Safety



\* Specifications subject to technical changes and tests. LONGi Solar reserves the right of interpretation.

**Positive power tolerance** (0 ~ +5W) guaranteed

**High module conversion efficiency** (up to 19.8%)

**Slower power degradation** enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

**Solid PID resistance** ensured by solar cell process optimization and careful module BOM selection

**Reduced resistive loss** with lower operating current

**Higher energy yield** with lower operating temperature


**Reduced hot spot risk** with optimized electrical design and lower operating current



Xian Runda Resource technology As Authorized Agent of Longi for sales  
Address: 18F, A-Plaza, Yuehan international building, High-tech development zone, xian China  
Tel: +8629 8177 8790 info@rundaenergy.com

# LR4-72HPH 420~440M

## Design (mm)

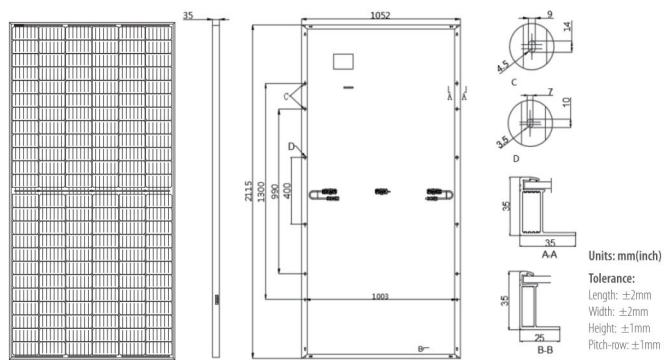

## Mechanical Parameters

Cell Orientation: 144 (6×24)  
Junction Box: IP68, three diodes  
Output Cable: 4mm<sup>2</sup>, 300mm in length, length can be customized  
Glass: Single glass  
3.2mm coated tempered glass  
Frame: Anodized aluminum alloy frame  
Weight: 24 kg  
Dimension: 2115×1052×35mm  
Packaging: 30pcs per pallet  
150pcs per 20'GP  
660pcs per 40'HC

## Operating Parameters

Operational Temperature: -40 °C ~ +85 °C  
Power Output Tolerance: 0 ~ +5 W  
Voc and Isc Tolerance:  $\pm 3\%$   
Maximum System Voltage: DC1500V (IEC / UL)  
Maximum Series Fuse Rating: 20A  
Nominal Operating Cell Temperature: 45 $\pm 2$  °C  
Safety Class: Class II  
Fire Rating: UL type 1 or type 2

## Electrical Characteristics

Test uncertainty for Pmax:  $\pm 3\%$

Model Number	LR4-72HPH-420M		LR4-72HPH-425M		LR4-72HPH-430M		LR4-72HPH-435M		LR4-72HPH-440M	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	420	311.1	425	314.8	430	318.5	435	322.2	440	326.0
Open Circuit Voltage (Voc/V)	48.8	45.5	49.0	45.7	49.2	45.9	49.4	46.1	49.6	46.3
Short Circuit Current (Isc/A)	11.04	8.90	11.11	8.95	11.19	9.02	11.26	9.08	11.33	9.13
Voltage at Maximum Power (Vmp/V)	40.2	37.1	40.4	37.3	40.6	37.5	40.8	37.7	41.0	37.9
Current at Maximum Power (Imp/A)	10.45	8.38	10.52	8.44	10.60	8.50	10.67	8.56	10.74	8.61
Module Efficiency(%)	18.9		19.1		19.3		19.6		19.8	

STC (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25 °C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20 °C, Spectra at AM1.5, Wind at 1m/s

## Temperature Ratings ( STC )


Temperature Coefficient of Isc: +0.057%/ °C  
Temperature Coefficient of Voc: -0.286%/ °C  
Temperature Coefficient of Pmax: -0.370%/ °C

## Mechanical Loading


Front Side Maximum Static Loading: 5400Pa  
Rear Side Maximum Static Loading: 2400Pa  
Hailstone Test: 25mm Hailstone at the speed of 23m/s

## I-V Curve


Current-Voltage Curve (LR4-72HPH-430M)



Power-Voltage Curve (LR4-72HPH-430M)

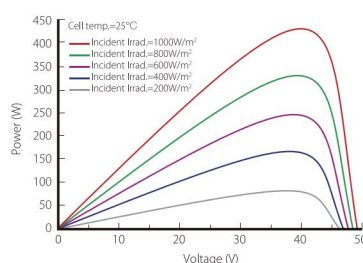

Current-Voltage Curve (LR4-72HPH-430M)

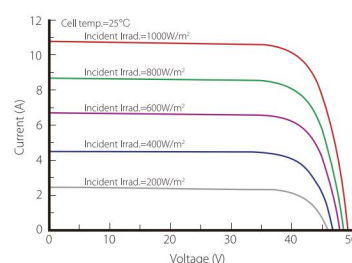

Xian Runda Resource technology As Authorized Agent of Longi for sales  
Address: 18F, A-Plaza, Yuehan international building, High-tech development zone, xian China  
Tel: +8629 8177 8790 info@rundaenergy.com

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.