


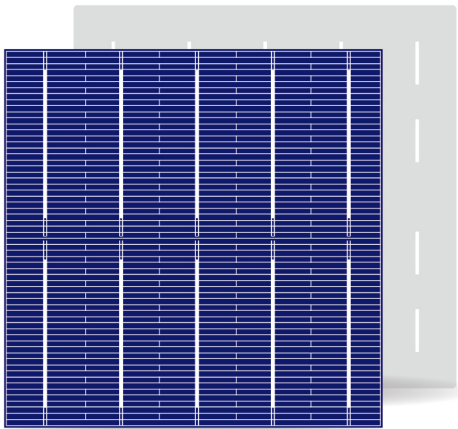

Product
最新产品
156.75-POLY-5BB-PID

技术规格 SPECIFICATION

转换效率 Efficiency(%)	最大功率 Pmpp(W)	最大电压 Umpp(V)	最大电流 Impp(A)	开路电压 Uoc(V)	短路电流 Isc(A)
19.00-19.10	4.67	0.5458	8.552	0.6407	9.032
18.90-19.00	4.64	0.5450	8.520	0.6399	9.006
18.80-18.90	4.62	0.5443	8.487	0.6387	8.977
18.70-18.80	4.59	0.5422	8.473	0.6370	8.963
18.60-18.70	4.57	0.5389	8.480	0.6347	8.975
18.50-18.60	4.55	0.5395	8.424	0.6342	8.913
18.40-18.50	4.52	0.5371	8.417	0.6321	8.911
18.30-18.40	4.47	0.5333	8.431	0.6296	8.930

产品 Product	多晶电池片 Polycrystalline silicon solar cell
尺寸 Dimension	156.75mm×156.75mm ±0.25mm
厚度 Thickness(Si)	200μm±15μm
正面 Front	蓝色氮化硅减反射膜,0.7毫米银浆栅线, 5栅 Blue silicon nitride antireflection coatings,0.7mm silver busbar ,5BB
背面 Back	铝背场, 背极分断2.0毫米宽银浆 Full-surface aluminum back-surface field ,2.0mm silver discrete soldering pads

产品图形 FEATURES

